ENCORE® ELECTRONICS

2010 Q3 Corporate & Product Overview

Content

- **Overview** goto
- **"*Making Connections Easy*"** goto
- **Why Encore** goto
- **Marketing Initiatives** goto
- **Strategic Goals** goto
- **Global Partners** goto
- **Encore Thin Client** goto
- **Product Overview** goto

All information included in this presentation is for marketing purpose only.

Overview

Founded:	1996
Corporate HQ:	La Puente, CA
Branch:	America and Taiwan
Factory:	Taiwan and China
Product:	Networking, Multimedia and Accessory
Target Market:	SOHO and Digital Home
Status:	Market leader in Latin American countries

Back to Content

All information included in this presentation is for marketing purpose only.

Making Connections Easy

- Easy-to-use products to facilitate communication and data exchange
- Products easily integrate with computers, communication products and consumer electronics
- Accessible communication channels to consumers and business partners

Back to Content

All information included in this presentation is for marketing purpose only.

Why Encore

- Wide range of products, with emphasis in Networking, Multimedia and Accessory
- Competitive pricing
- Dedication to quality and service
- Investment in R&D
- Adaptive and responsive marketing

Back to Content

All information included in this presentation is for marketing purpose only.

Marketing Initiatives

Increased International Exposure

As Encore Electronics grows stronger, our products have frequently received coverage by major media in different countries.

Media Coverage

IT Shopping in Argentina

PCMag in USA

Ciudad del Este TI in Brazil

Back to Content

All information included in this presentation is for marketing purpose only.

Marketing Initiatives

Channel Support

We also work closely with our channel partners and support their local campaigns.

Back to Content

All information included in this presentation is for marketing purpose only.

Marketing Initiatives

Trade Show

Our growing presence in international tradeshows is a strong statement that Encore Electronics is a trustworthy partner you can count on.

2010 CES

2010 CES

Back to Content

All information included in this presentation is for marketing purpose only.

Marketing Initiatives

Trade Show

2010 Computex

2010 Computex

Back to Content

All information included in this presentation is for marketing purpose only.

Marketing Initiatives

Trade Show

2009 CES

2009 CES

Back to Content

All information included in this presentation is for marketing purpose only.

Marketing Initiatives

Trade Show

2008 CES

2008 Computex

Back to Content

All information included in this presentation is for marketing purpose only.

Marketing Initiatives

Dedication to Customer Satisfaction

We understand all customers want are quality products that can get the job done. This is why we are meticulous in quality control. Moreover, we constantly offer tech support hotlines to new countries. Our knowledgeable staffs are ready 24/7 to answer your questions.

Back to Content

All information included in this presentation is for marketing purpose only.

Marketing Initiatives

Dedication to Customer Satisfaction

Most of our products received high scores in customer feedbacks.

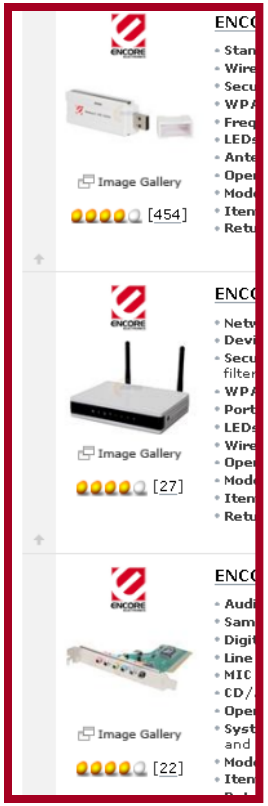

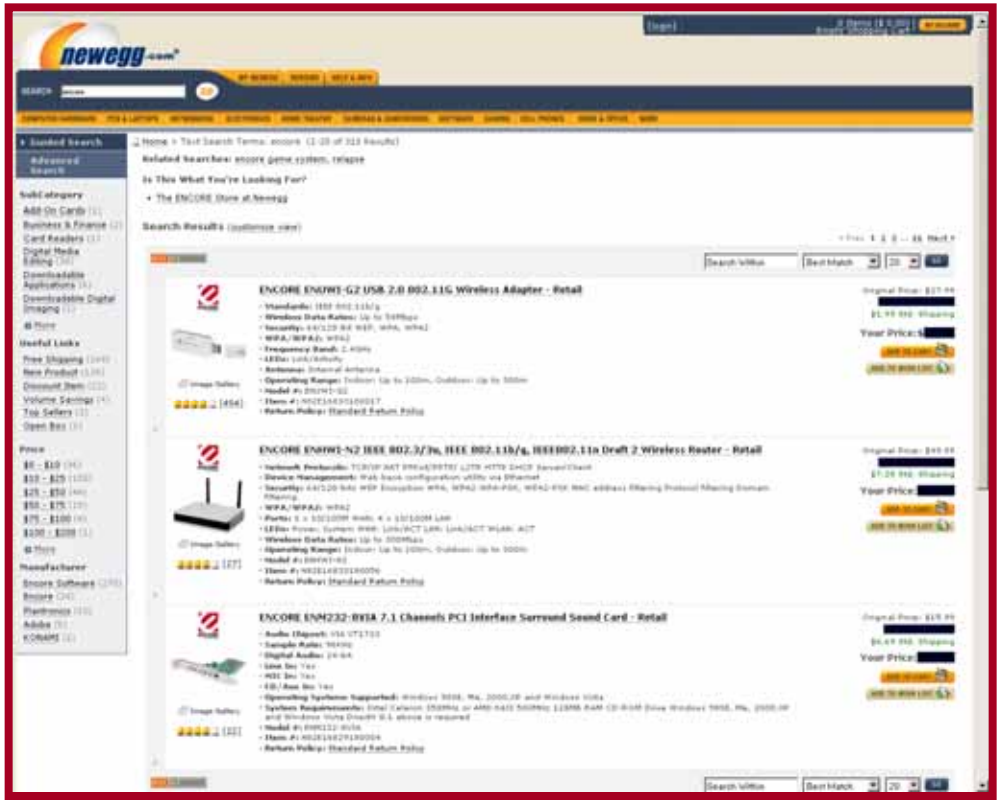
newegg.com
ENCORE ENGWI-G2 USB 2.0 802.11G Wireless Adapter - Retail
ENCORE ENWI-N2 IEEE 802.3/3u, IEEE 802.11b/g, IEEE802.11a Draft 2 Wireless Router - Retail
ENCORE ENM232-BRIA 7.1 Channels PCI Interface Surround Sound Card - Retail

Our products received 4 out of 5 stars on NewEgg.com's customer reviews.

Back to Content

All information included in this presentation is for marketing purpose only.

Marketing Initiatives

International Support Hotlines

Back to Content

All information included in this presentation is for marketing purpose only.

Marketing Initiatives

International Support Hotlines

USA	+1 626-606-3108	support@encore-usa.com
Argentina — Buenos Aires — Córdoba	 +54 11-6632-2120 +54 35-1568-1873	 soporte.argentina@encore-usa.com
Brazil	+55 11-3958-3829 (The service hour is 9a.m. to 6p.m., Monday-Friday.)	suporte.brasil@encore-usa.com
Chile	+56 2-581-4903	soporte.chile@encore-usa.com
Colombia	+57 1-381-9274	soporte.colombia@encore-usa.com
España	+34 912-919-405	soporte.espana@encore-usa.com
México	+52 55-2789-5414	soporte.mexico@encore-usa.com
Perú	+51 1-708-5421	soporte.peru@encore-usa.com
Philippines	+63 2-444-9054	support.philippines@encore-usa.com
Spain	+34 912-919-405	soporte.espana@encore-usa.com
Venezuela	+58 212-335-7530	soporte.venezuela@encore-usa.com
Resto de América Latina		soporte.latinoamerica@encore-usa.com

Back to Content

All information included in this presentation is for marketing purpose only.

Marketing Initiatives

More Consumer Promotions

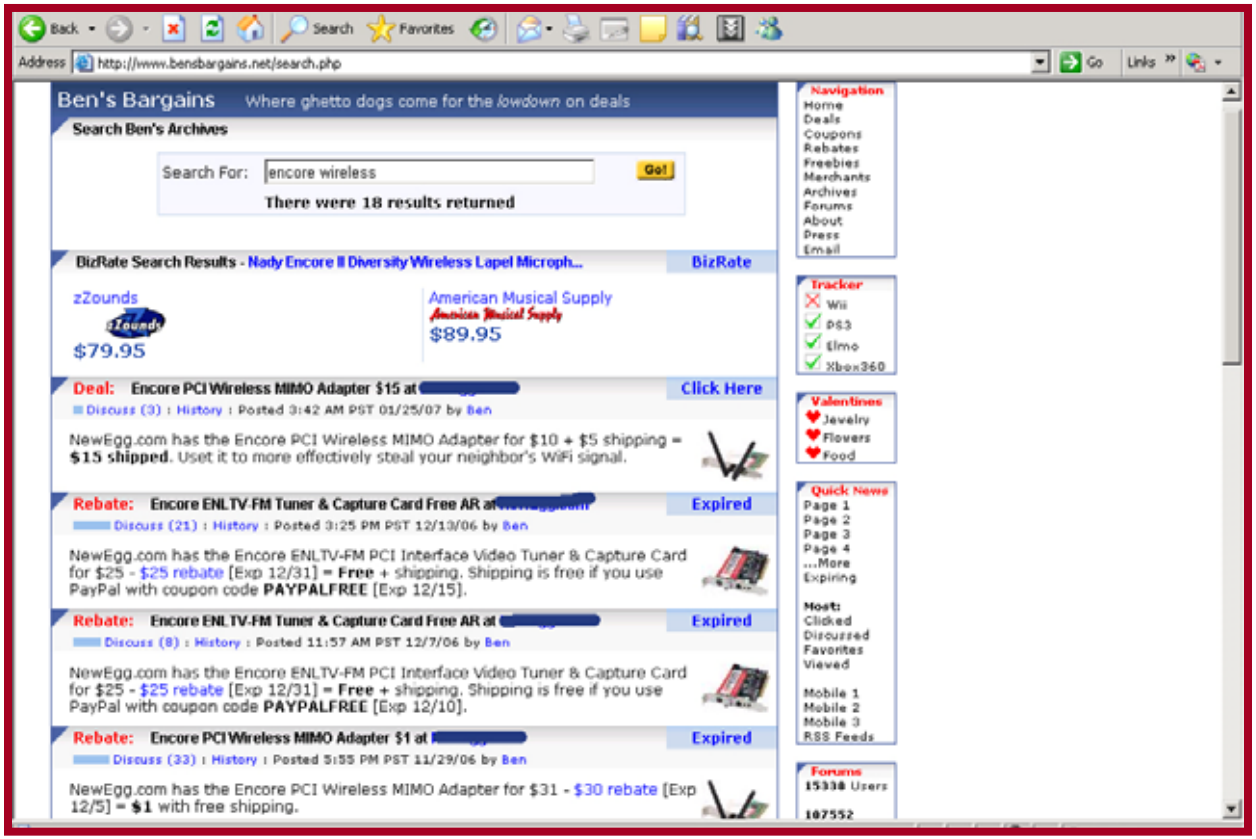
Back
Search
Favorites
Address
http://www.bensbargains.net/search.php
Go
Links
Ben's Bargains
Where ghetto dogs come for the lowdown on deals
Search Ben's Archives
Search For:
encore wireless
Go!
There were 18 results returned
BizRate Search Results - Nady Encore II Diversity Wireless Lapel Microph...
BizRate
zZounds
$79.95
American Musical Supply
$89.95
Deal: Encore PCI Wireless MIMO Adapter $15 at
Click Here
Discuss (3) : History : Posted 3:42 AM PST 01/25/07 by Ben
NewEgg.com has the Encore PCI Wireless MIMO Adapter for $10 + $5 shipping = $15 shipped. Uset it to more effectively steal your neighbor's WiFi signal.
Rebate: Encore ENLTV-FM Tuner & Capture Card Free AR at
Expired
Discuss (21) : History : Posted 3:25 PM PST 12/13/06 by Ben
NewEgg.com has the Encore ENLTV-FM PCI Interface Video Tuner & Capture Card for $25 - $25 rebate [Exp 12/31] = Free + shipping. Shipping is free if you use PayPal with coupon code PAYPALFREE [Exp 12/15].
Rebate: Encore ENLTV-FM Tuner & Capture Card Free AR at
Expired
Discuss (8) : History : Posted 11:57 AM PST 12/7/06 by Ben
NewEgg.com has the Encore ENLTV-FM PCI Interface Video Tuner & Capture Card for $25 - $25 rebate [Exp 12/31] = Free + shipping. Shipping is free if you use PayPal with coupon code PAYPALFREE [Exp 12/10].
Rebate: Encore PCI Wireless MIMO Adapter $1 at
Expired
Discuss (33) : History : Posted 5:55 PM PST 11/29/06 by Ben
NewEgg.com has the Encore PCI Wireless MIMO Adapter for $31 - $30 rebate [Exp 12/5] = $1 with free shipping.
Navigation
Home
Deals
Coupons
Rebates
Freebies
Merchants
Archives
Forums
About
Press
Email
Tracker
Wii
PS3
Elmo
Xbox360
Valentines
Jewelry
Flowers
Food
Quick News
Page 1
Page 2
Page 3
Page 4
...More
Expiring
Most:
Clicked
Discussed
Favorites
Viewed
Mobile 1
Mobile 2
Mobile 3
RSS Feeds
Forums
15338 Users
107552

Back to Content

All information included in this presentation is for marketing purpose only.

Strategic Goals

Entering into the 15th year in design, manufacture and supply of a wide range of computer networking products and peripherals, Encore now focuses on:

- **Wireless Networking**
- **Networked (IP) Peripherals**
- **Multimedia**
- **Netbook Accessories**
- **Thin Client**

Back to Content

All information included in this presentation is for marketing purpose only.

Global Partners

Y-B
Initiative & Projects

Back to Content

All information included in this presentation is for marketing purpose only.

Encore Thin Client

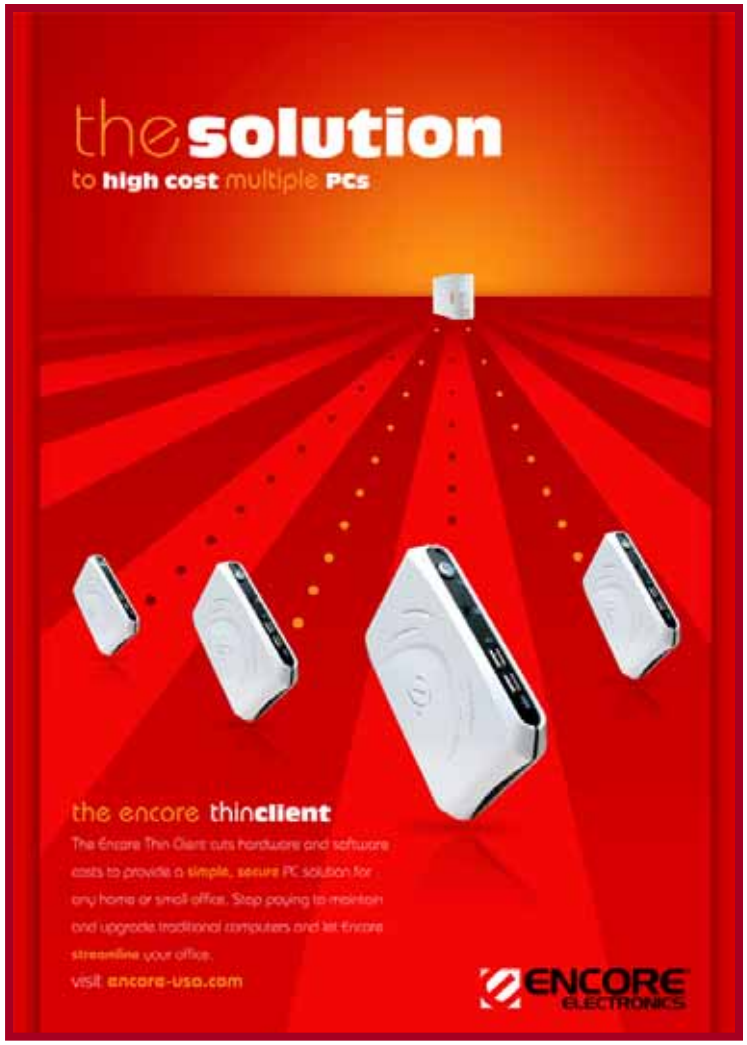

Back to Content

All information included in this presentation is for marketing purpose only.

Introducing Encore Thin Client

ENCORE THIN CLIENT

-The Future of Enterprise Computing

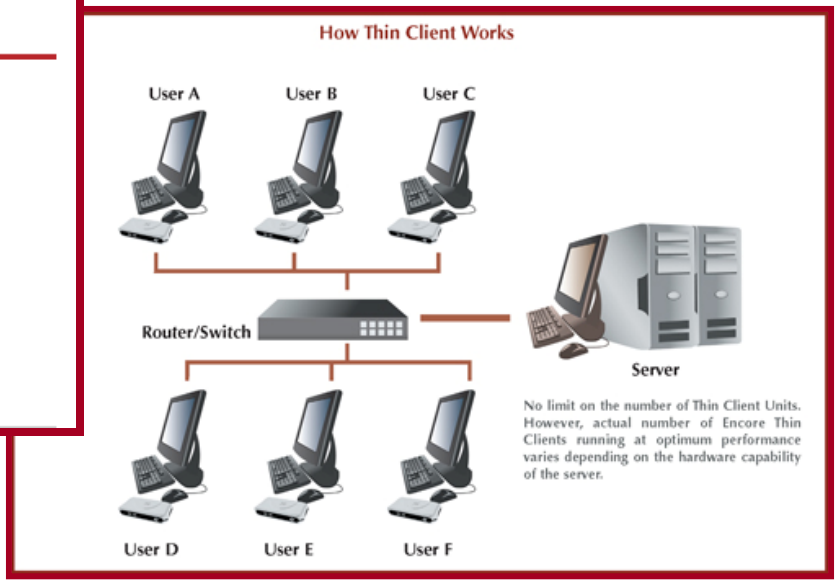
How Thin Client Works
User A
User B
User C
Router/Switch
Server
No limit on the number of Thin Client Units. However, actual number of Encore Thin Clients running at optimum performance varies depending on the hardware capability of the server.
User D
User E
User F

- **Cost-effective alternative to traditional computer workstations**
- **Save cost in IT maintenance and electricity**
- **Easy to implement best network security practices**

Back to Content

All information included in this presentation is for marketing purpose only.

Product Overview

A. **Wireless Networking** goto

B. **Network (IP) Accessory** goto

C. **Wired Networking** goto

D. **Multimedia** goto

E. **Accessory** goto

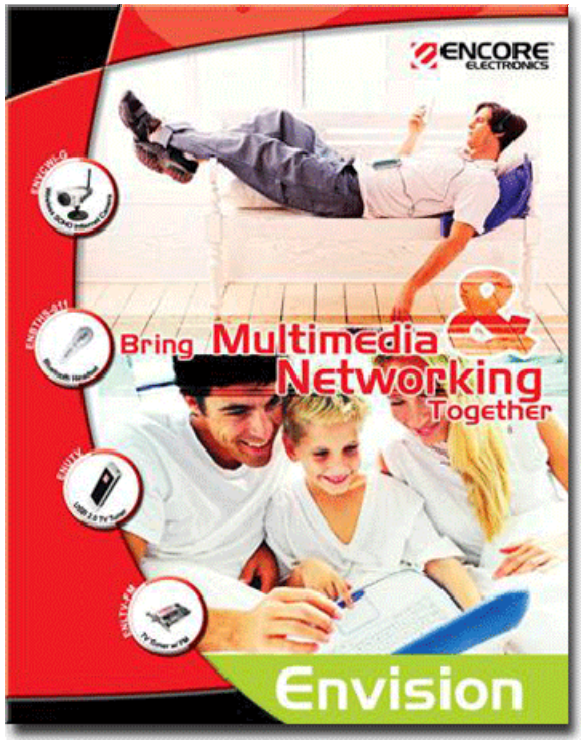

Back to Content

All information included in this presentation is for marketing purpose only.

A. Wireless Networking

-STANDARD-

- Performance Overview
- 802.11n – N300 Series (New)
- 802.11n – N150 Series (New)
- 802.11g – 54 Mbps

-FUNCTION-

- Gaming Router (coming soon)
- 3G Router
- Router
- Router with High Gain Antenna (New)
- Network Adapters
- ADSL 2+ Modems (New)

Back to Content

Back to Product

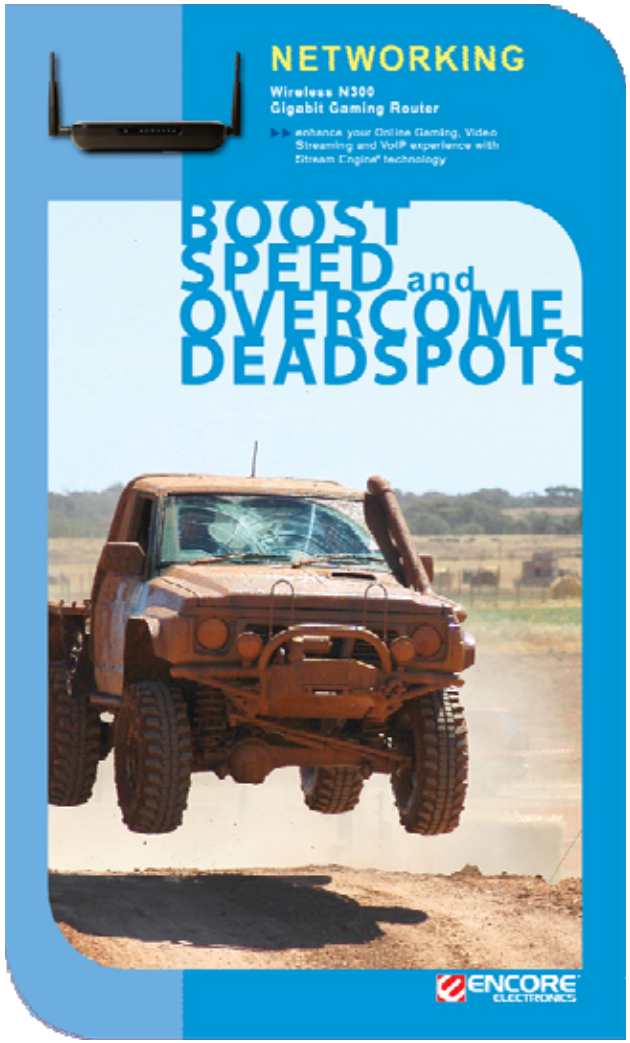
NETWORKING
Wireless N300
Gigabit Gaming Router
enhance your Online Gaming, Video Streaming and VoIP experience with Stream Engine® technology
BOOST SPEED and OVERCOME DEADSPOTS
ENCORE ELECTRONICS

Back to Wireless

Back to Product

All information included in this presentation is for marketing purpose only.

Performance Overview

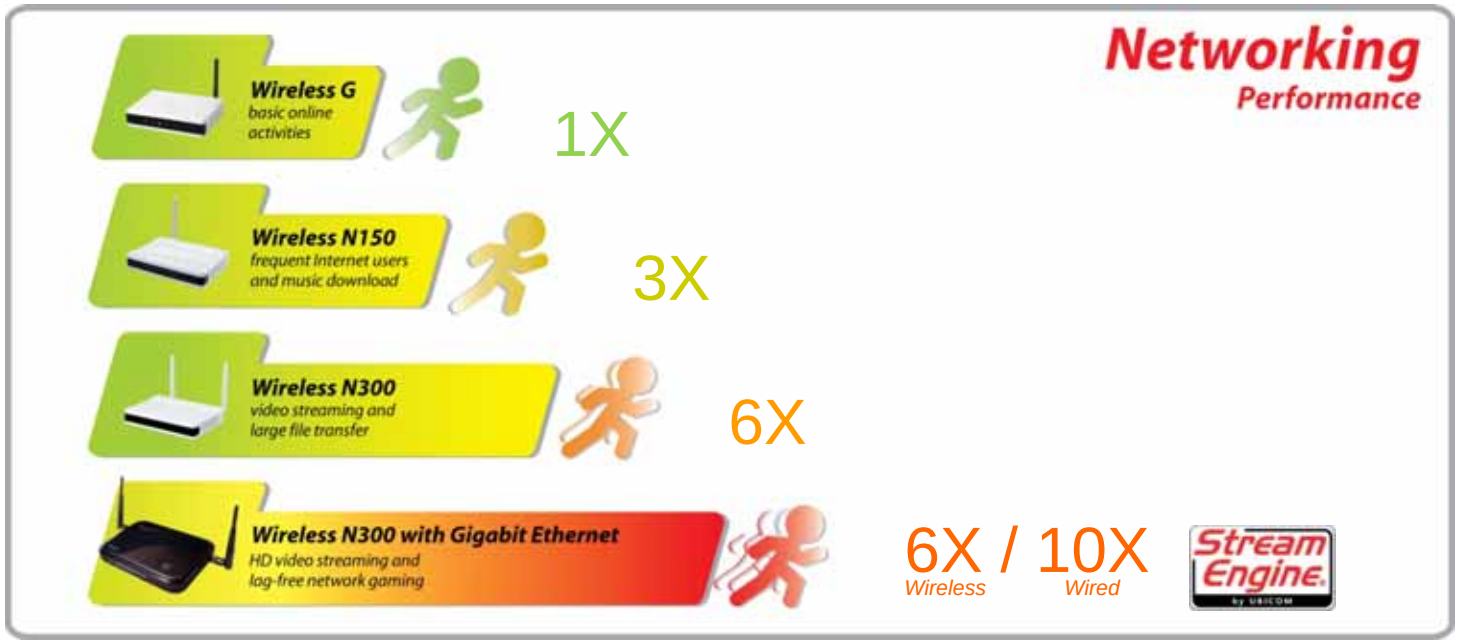

Back to Wireless

Back to Product

All information included in this presentation is for marketing purpose only.

Gaming Router / N300

EN2HWI-N3

(Mid Q3)

Wireless N300 Gigabit Gaming Router

- 3-in-1: Router / Access Point / WDS
- Powerful 3dBi Detachable Antennas
- Compatible with Game Consoles
- One Button Security Setup and Dynamic Parental Control
- Create Up to 4 Wireless Networks with 1 Device (Multiple SSID)

SPECIFICATION

Wireless Standard	802.11n, backward compatible with 802.11b/g
Wireless Data Rate	Up to 300 Mbps*
WAN Port	1 x 10/100/1000 Mbps Ethernet port (for Cable/DSL modem)
LAN Port	4 x 10/100/1000 Mbps Ethernet ports
Operation Mode	Router, Access Point, WDS
Wireless Security	WEP, WPA/WPA2, WPA/WPA2-PSK, WPA/WPA2-EAP, WPS
QoS	Stream Engine, WLAN Intellegent Stream Handling (WISH), Wireless Multimedia (WMM)
Advanced Features	Multiple SSID, Parental Controls with Web Filter, UPnP, Virtual Server Mapping, Dynamic DNS, DMZ, Stateful Packet Inspection (SPI), NAT Firewall, VPN Pass-Through
Antenna	2 x detachable 3dBi antenna with SMA connector
Dimensions	18.3 x 13.5 x 3.7 cm (L x W x H) (without antenna)

bitdefender internet security 90-day free trial

Back to Wireless

Back to Product

All information included in this presentation is for marketing purpose only.

802.11n – N300

EN2HWI-N3

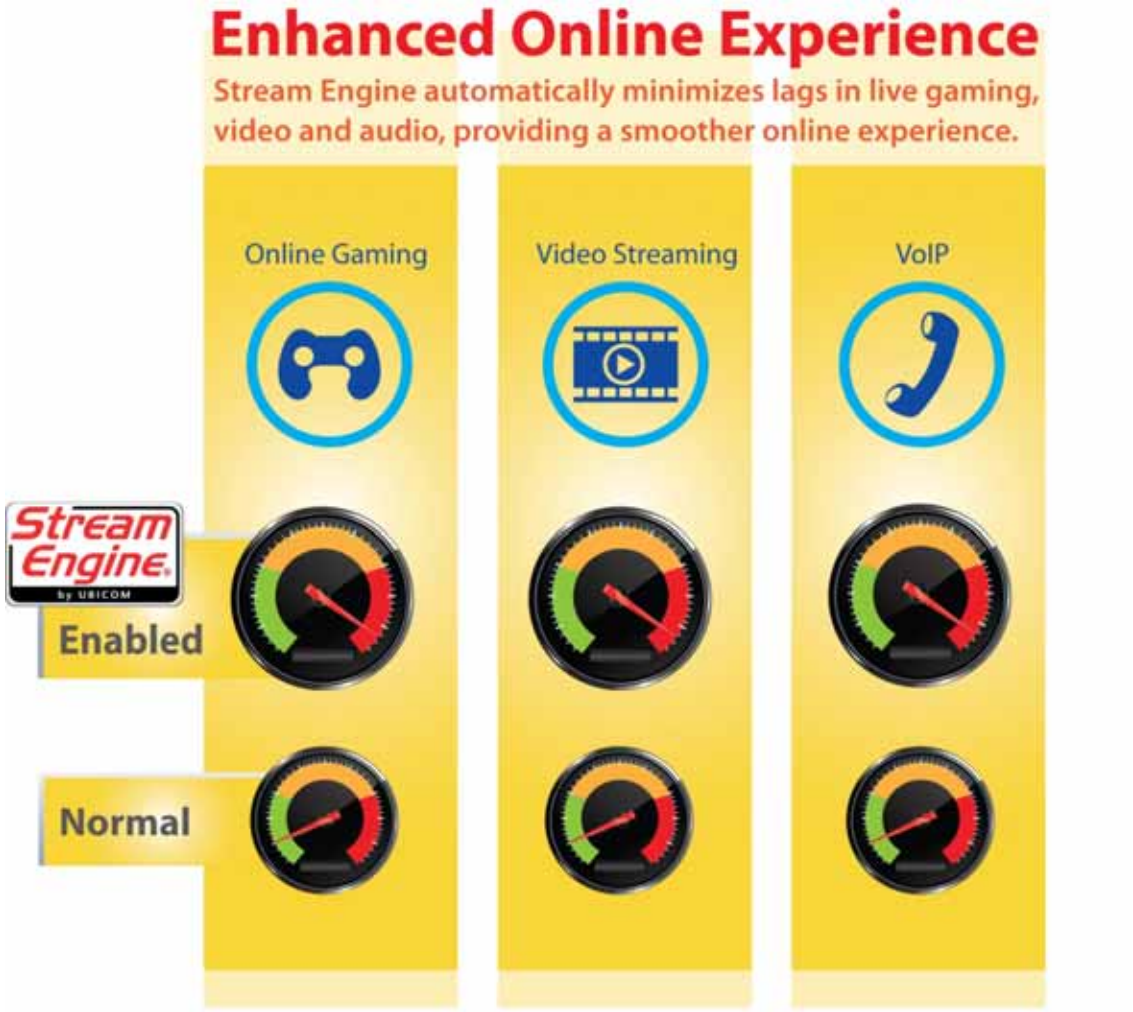

Back to Wireless
Back to Product

All information included in this presentation is for marketing purpose only.

802.11n – N300

ENHWI-2AN3

(Popular)

Wireless-N Router and Repeater

** Enhanced version with 4 dBi antenna will be available at the end of Q3.*

- Setup New Wireless Network in Router Mode
- Extend Existing Wireless Coverage in Repeater mode
- Advanced Wireless Security and Firewalls
  - Safeguards your data and prevents intruders
- Dynamic Parental control
  - Filters web addresses and keywords to keep harmful content away
- Create Up to 4 Wireless Networks with 1 Device (Multiple SSID)
  - Setup separate networks for different departments in your office, or provide guest access for visitors at home

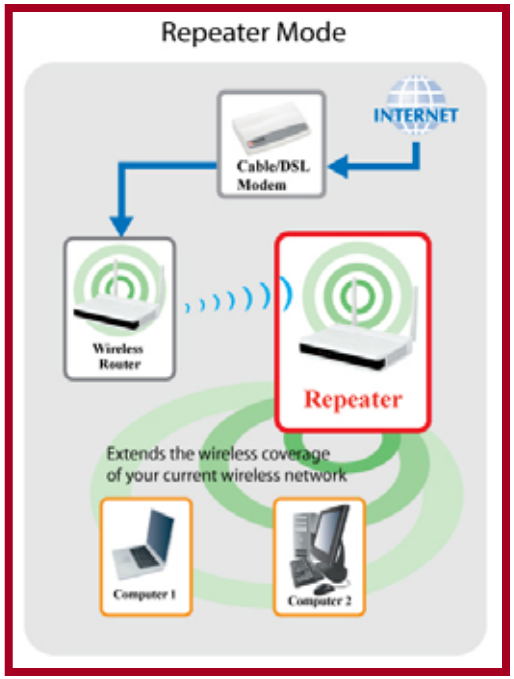

SPECIFICATION

Wireless Protocol	802.11n, Backward Compatible with 802.11b/g
WAN Port	1 x 10/100Mbps Ethernet Port
LAN Port	4 x 10/100Mbps Ethernet Ports
Wireless Security	WEP, WPA, WPA2, WPA-PSK, WPA2-PSK, WPS™
Advanced Security Features	Stateful Packet Inspection (SPI), NAT Firewall, Denial-of-Service (DoS) Attack Prevention, VPN Pass-Through, Multiple SSID, Wireless Multimedia (WMM) based Quality of Service (QoS), Bandwidth Control, UPnP
Antenna	2 x External 2dBi Antennas with SMA Connector
Dimensions	97 x 25 x 138 mm (W x H x L) (without antenna)

Back to Wireless
Back to Product

All information included in this presentation is for marketing purpose only.

802.11n – N300

NX2 Series

(Popular)

1T2R Network Adapters

- Compatible with 802.11n Draft 2.0 with wireless speed up to 300Mbps
- Backward compatible with 802.11 b/g
- Supports Multiple-Input-Multiple-Output (MIMO) technology with 1TX/2RX
- Maximum reliability, throughput and connectivity with automatic data rate switching
- Supports WPA-PSK, WPA2-PSK, WPA, WPA2 , 64/128-bit WEP wireless securities
- Two internal high performance antennas
- Simple user setup & diagnostics utilities

N Series

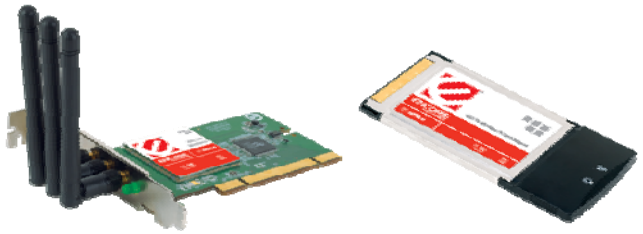

**PCI (2T3R) / PC CARD (2T3R) **

2T3R / 2T2R Network Adapters

- Compatible with 802.11n Draft 2.0 with wireless speed up to 300Mbps
- Backward compatible with 802.11 b/g
- Supports Multiple Input Multiple Output (MIMO) technology with 2TX/3RX
- Maximum reliability, throughput and connectivity with automatic data rate switching
- Supports 64/128-bit WEP, WPA-PSK, WPA2-PSK
- Three 2dBi dipole antennas with SMA connector
- Simple user setup & diagnostics utilities

Back to Wireless

Back to Product

All information included in this presentation is for marketing purpose only.

3G Router / N150

ENHWI-3GN3

(Popular)

3G MOBILE BROADBAND WIRELESS N150 ROUTER plus REPEATER

- 3G Broadband and Cable / DSL Broadband Router 2-in-1
  - Share 3G broadband at locations with no Cable / DSL connection
- Extends Existing Wireless Coverage in Repeater mode
- Advanced Wireless Security and Firewall
- Push Button Security Setup and Dynamic Parental control
- Creates Up to 4 Wireless Networks with 1 Device (Multiple SSID)
  - Sets up individual wireless networks for different user groups

SPECIFICATION

3G Modem Port	1 x USB 2.0
Wireless Standard	802.11n, backward compatible with 802.11b/g
Wireless Data Rate	Up to 150 Mbps*
WAN Port	1 x 10/100Mbps Ethernet port (for Cable/DSL modem)
LAN Port	2 x 10/100Mbps Ethernet ports
Wireless Security	WEP, WPA, WPA2, WPA-PSK, WPA2-PSK, WPS
Advanced Features	Multiple SSID, Wireless Multimedia (WMM) based Quality of Service (QoS), Bandwidth Control, Policy-based Parental Controls, UPnP, Stateful Packet Inspection (SPI), NAT Firewall, Denial-of-Service (DoS) Attack Prevention, VPN Pass-Through
Antenna	1 x detachable 2dBi antenna with SMA connector
Dimensions	138 x 97 x 25 mm (L x W x H) (without antenna)

Back to Wireless
Back to Product

All information included in this presentation is for marketing purpose only.

802.11n – N150

ENLWI-N3

(End of Q3)

Wireless N150 PCI Adapter

- Greater Bandwidth
  - meets the demand of bandwidth-intensive applications, such as HD video streaming, large file downloading and online gaming
- Advanced Wireless Security
  - supports WEP, WPA, WPA2, and WPSTM encryptions
- Improved Wireless Reception
- Easy Installation
- Turn Your Computer into a Wireless Router in AP Mode

SPECIFICATION

Wireless Protocol	802.11n, backward compatible with 802.11b/g
Interface	PCI 2.2, 32-bit
Security	802.1x, 64/128-bit WEP, WPA-PSK, WPA2-PSK, WPA, WPA2, WPS™
QoS	Wi-Fi Multimedia (WMM and WMM-PS)
Antenna	1x external 2dBi antenna with SMA connector
Dimensions	132 x 121 x 22 mm (W x H x L)

Back to Wireless

Back to Product

All information included in this presentation is for marketing purpose only.

802.11n – N150

ENHWI-N3

(Popular)

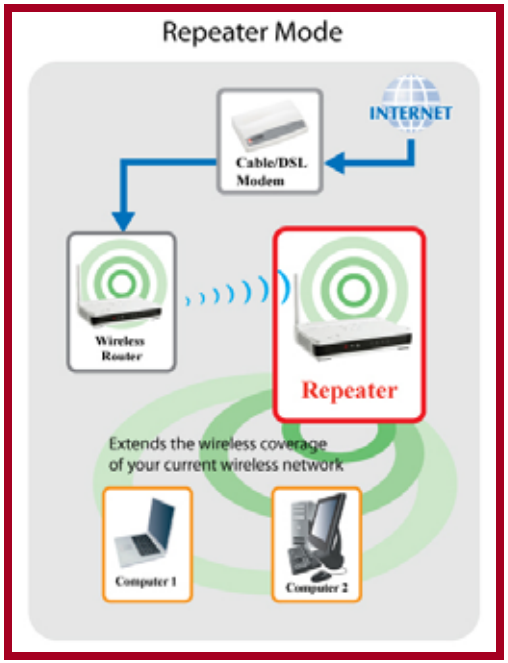

802.11n Wireless N150 Router and Repeater

** Enhanced version with 4 dBi antenna will be available at the end of Q3.*

- Control bandwidth though QoS
  - ensuring applications, such as online gaming and video streaming, have sufficient bandwidth
- Advanced parental control features
  - keyword and web address filters
- Create up to 4 different workgroups through multiple SSID
  - improve data sharing within groups, while tighten data security among groups
- 1-step security setup with WPS button

SPECIFICATION

Wireless Protocol	802.11n (draft 2.0 compliant), backward compatible with 802.11b/g
LAN Port	4 x 10/100Mbps Auto-MDIX Ethernet ports
WAN Port	1 x 10/100Mbps Auto-MDIX Ethernet port
Wireless Security	64/128-bit WEP Encryption, WPA, WPA2, WPA-PSK, WPA2-PSK
Advanced Security Features	Stateful Packet Inspection (SPI), NAT firewall, VPN Pass-through / IPSec, MAC address filtering, Virtual server mapping, WPS
Simple Service Discovery Protocol	UPnP
Antenna	External 2dBi dipole antennas with SMA connector
Dimensions	97 x 25 x 138 mm (W x H x L) (without antenna)

Back to Wireless
Back to Product

All information included in this presentation is for marketing purpose only.

802.11n – N150

ENUWI-N3

(Popular)

802.11n Wireless N150 USB Adapter

- Compact design
- 1-step security setup with WPS button
- Better download/upload performance through QoS
- Supports WPA-PSK, WPA2-PSK, WPA, WPA2, 64/128-bit WEP wireless securities
- Internal high performance printed antenna
- Drivers support Windows® XP, Windows Vista™, Windows® 7 and Mac OSX

SPECIFICATION

Wireless Protocol	802.11n (draft 2.0 compliant), backward compatible with 802.11b/g
Interface	USB 2.0 / 1.x (using USB 1.x will affect device performance)
Security	64/128-bit WEP, WPA, WPA-PSK, WPA2, WPA2-PSK
QoS	Wi-Fi Multimedia (WMM)
Antenna	Internal printed antenna
Dimensions	21 x 10.6 x 63 mm (W x H x L)

Back to Wireless
Back to Product

All information included in this presentation is for marketing purpose only.

802.11n – N150

ENUWI-N4

(Popular)

Wireless N150 Mini USB Adapter

- Easy Installation
- Advanced Wireless Security
  - supports WEP, WPA, and WPA2 encryptions
- Up to 150 Mbps
  - meets the demand of the bandwidth-intensive applications, such as HD video streaming, large file downloading and online gaming
- Ultra Compact Design
- Push Button Security Setup

SPECIFICATION

Wireless Protocol	1T1R 802.11n, backward compatible with 802.11b/g
Speed	Up to 150 Mbps
Interface	USB 2.0 / 1.x (using USB 1.x will affect device performance)
Security	64/128-bit WEP, WPA, WPA-PSK, WPA2, WPA2-PSK, WPS
QoS	Wi-Fi Multimedia (WMM)
Antenna	Internal printed antenna
Dimensions	33 x 17 x 7 mm (L x W x H)

Back to Wireless

Back to Product

All information included in this presentation is for marketing purpose only.

ENHWI-G3

Wireless-G Broadband Router w/ 4-port Switch

- 4 x 10/100Mbps Fast Ethernet port for LAN with Auto MDI-X function
- 1 x 10/100Mbps WAN port for ADSL / Cable Modem with Auto MDI-X function
- Supports wireless data encryption with 64/128-bit WEP standard for security
- Supports enhance security for WPA-PSK, WPA2-PSK, WPA and WPA2
- Web-based configuration tools and management via WEB Browser
- Supports DHCP Server / Client

ENPWI-G2

** PCI / USB / PC CARD **

Wireless-G Notebook Adapter

- Capable transferring at speeds up to 54Mbps for up to 100 feet
- Supports both Ad-Hoc and Infrastructure modes
- Achieve best possible connection with Dynamic rate shifting technology. Convert your desktops to wireless workstations
- Wireless technology eliminates the hassle of running Ethernet wires around the office or home
- WEP and WPA encryption protects your network and keeps intruders out
- Security: WPA-PSK, 64/128-bit WEP

Back to Wireless

Back to Product

All information included in this presentation is for marketing purpose only.

ENDSL-4R5G

(New)

Wireless Router / High Speed ADSL 2+ Modem

- 3X Faster
  - up to 24Mbps downstream and 1Mbps upstream Convenient and Portable USB Mini-Dock
- 3-in-1 Device
  - ADSL 2+ modem, Wireless G access point and 4-port Ethernet router
- Quality of Service (QoS)
  - improves the performances of video streaming, online gaming and VoIP
- Multiple SSID
  - runs up to 4 wireless networks concurrently for different user types with 1 device
- Advanced Security
  - supports WEP, WPA, or WPA2 encryption and SPI / NAT firewalls
- Easy Installation

SPECIFICATION

• ADSL Compliance	ADSL2+, backward compatible with ADSL2 and ADSL
• Wireless Protocol	802.11g, backward compatible with 802.11b
• LAN Port	4 X 10/100Mbps Auto-MDIX Ethernet port (IEEE 802.3 / 802.3u)
• Wireless Security	64/128-bit WEP, WPA, WPA2, WPA-PSK, WPA2-PSK
• Advanced Security Features	Stateful Packet Inspection (SPI), NAT firewall, VPN Pass-through, MAC Address Filtering, Virtual server mapping, DMZ, Denial of Service Preventions (DoS)
• Additional Features	UPnP, Quality of Service (QoS)
• Antenna	1X Detachable Reversed-SMA External dipole antenna
• Dimensions (L x W x H)	165 x 115 x 32 mm (without antenna)

Back to Wireless

Back to Product

All information included in this presentation is for marketing purpose only.

B. Network (IP) Accessory

-STANDARD-

- 802.11n
- 802.11g
- Gigabit Ethernet
- Fast Ethernet

-FUNCTION-

- USB-over-Network
- Network (IP) Camera
- Print Server
- Wireless Coverage Expansion

Back to Content

Back to Product

USB-over-Network

ENNUS1

(Popular)

USB-OVER-NETWORK SERVER

- Share USB Device
  - Make connected devices sharable throughout your home or office network
- Support up to 5 Devices
  - Multi-functional printers, external hard drives, MP3 players, webcams and other type of USB devices, when combining with an external USB Hub
- Work with Wireless Network
  - When connecting ENNUS1 to a wireless router
- Cost-Saving
  - no need to purchase Network Attached Storage enclosures or print servers separately Push Button Security Setup

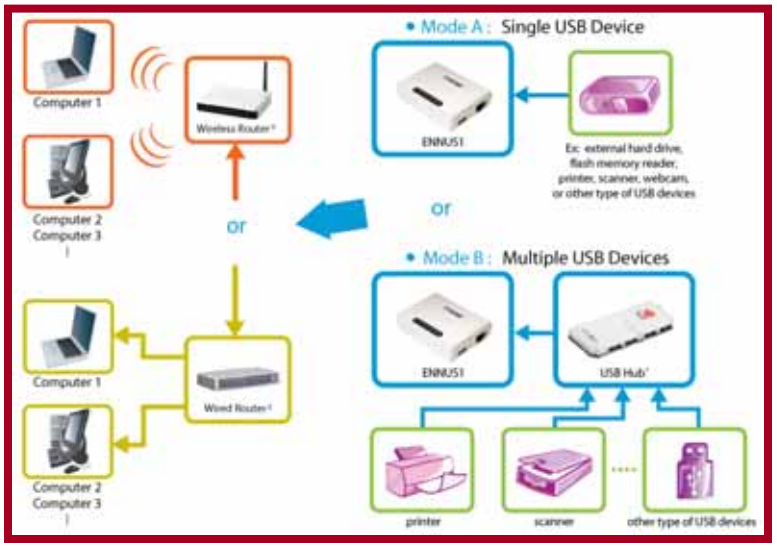

SPECIFICATION

Standard	**IEEE 802.3 10Base-T, IEEE 802.3u 100Base-TX**
Device Interface	**1X USB 2.0 / backward compatible with USB 1.1**
Network Port	**1X 10/100 Mbps RJ45**
Network Protocol	**TCP/IP, DHCP, UPnP**
Management	**Web page and PC Utility**
Dimensions (L x W x H)	**80 x 60 x 25 mm**

Back to Network Accessory
Back to Product

All information included in this presentation is for marketing purpose only.

ENVCWI-PTG1

(Popular)

Wireless Network (IP) Camera w/ Pan & Tilt

- Eliminate Blind Spots:
  - Pan & tilt to cover wider areas
- Remote Access:
  - From anywhere with an Internet access or local area network (LAN)
- Monitor Up to 16 Cameras:
  - Through the bundled UltraView software
- Two-way Audio
  - With built-in microphone and external speaker (not included)
- Link to Home Security System:
  - External devices can be connected through the GPIO port

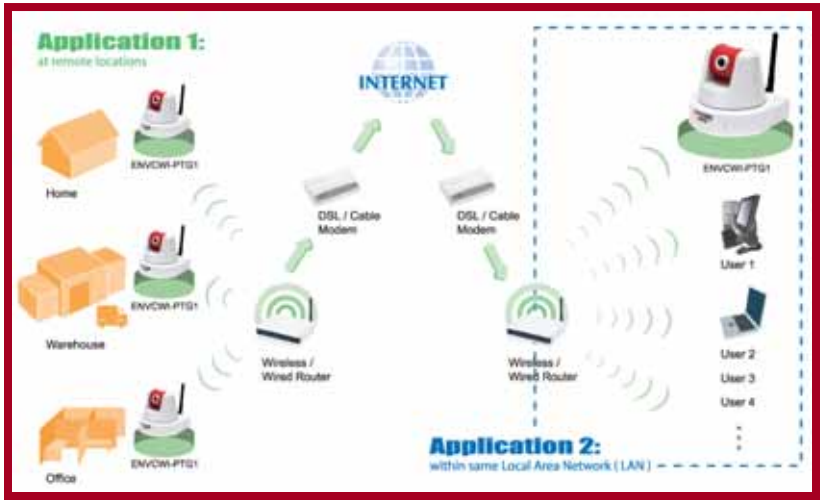

SPECIFICATION

Wireless Protocal	802.11g, backward compatible with 802.11b
Wireless Security	WEP 64/128 bit, WPA-PSK, WPA2-PSK
LAN Port	1 X 10/100Mbps / auto-MDIX Ethernet port
Lens	Type: board lens / Aperture (F/No.): 1.8 Focus Length: 4.0mm / View Angle(diagonal): 64 degree
Image Sensor	1/4" color CMOS sensor / Minimum Illumination: 0.5 LUX
Pan / Tilt Range	Pan: +165 ~ -165 degrees / Tilt: +90 ~ -15 degrees
Video	Compression: M-JPEG / Resolution: up to 640x480 (30fps)
Audio	Input: built-in microphone / Output: 3.5mm mono jack
GPIO	1 in / 1 out
Advanced Features	Motion Detection / Email Notification FTP Upload / Scheduled Recording

Back to Network Accessory

Back to Product

All information included in this presentation is for marketing purpose only.

IP Camera

ENVCWI-G1

Wireless-G (IP) Camera

- Remote Access-from anywhere with an Internet access or LAN
- High-Quality Video-MJPEG codec 5 levels
- Browser-supports JAVA mode for Firefox,Safari,and IE 6.0 above
- Motion Detection-supports two selectable motion detection windows
- UltraView Software-support monitoring and recording up to 16 cameras simultaneously
- Easy Installation-with the Smart Setup Wizard

ENVCWI-G2

Wireless-G (IP) Camera w/ Night Vision

- Support 802.11g/b wireless LAN and 10/BaseT/100BaseTX Ethernet with Auto-MDI/MDIX
- Simple to use just plug and view the image from the Internet Camera with a valid IP address
- Allows remote access from web browser for live image viewing
- Powerful software for image capture and video recording
- Recording and E-mail sending triggered by Motion Detection, Schedule, and Manual.
- Supports TCP/IP networking, UPnP, SMTP e-mail, HTTP and other Internet related protocols, Wireless LAN Security WEP(64/128bit) and WPA-PSK
- Embedded Web UI configuration with Administrator ID/Password protection

Back to Network Accessory

Back to Product

All information included in this presentation is for marketing purpose only.

Print server

Sample Wireless Print Server Illustration

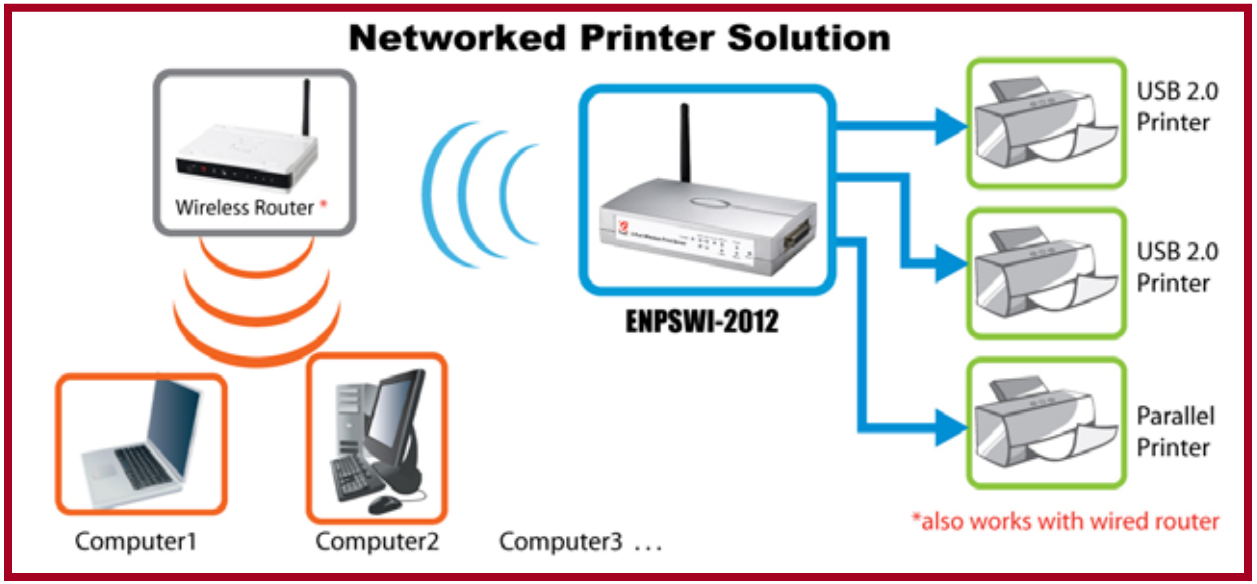

Back to Network Accessory

Back to Product

All information included in this presentation is for marketing purpose only.

Print server

ENPSWI-2012

3-Port Wireless Print server

- 802.11g wireless, backward compatible with 802.11b
- Equipped with 2 USB 2.0, and 1 parallel ports
- Multi protocol support is ideal for shared printing in mixed-LAN environments
- IP assignment support for DHCP, BOOTP and RARP
- Provide Flash memory for easy firmware upgrade
- E-mail notification for printer error messages
- Support Web configuration, E-Mail printing and FTP printing, IPP, UPnP, Mac 10.2 “Rendezvous” zero-configuration function, HP GDI printer, WPA, WCN

ENPS-MF1

1-Port Multifunctional Print Server

- Features one USB 2.0 port
- Shares your multifunctional printer (printer / scanner / fax / copier) with everyone in the network
- Shares USB Storage devices, such as hard drive, pen drive and memory card reader with everyone in the network as well
- Provides easy-to-use software and web-browser-based configuration utility

Back to Network Accessory

Back to Product

All information included in this presentation is for marketing purpose only.

Print server

ENPS-2001

1-USB 2.0 Print Server

- Netware: Fully compatible with DHCP, NDS and Bindery
- Windows NT/2000: TCP/IP LPR Port Printing, IPX, NetBEUI and TCP/IP
- Windows 95/98/ME: Supports Windows Peer-to-Peer Networks, IPP, IPX, NetBEUI and TCP/IP.
- MAC OS: Supports AppleTalk (Ethernet Phase II) with MAC OS version 8.0 or after
- UNIX: Supports RFC 1179 standard, IPP, TFTP, RARP, BOOTP and DHCP
- Internet (via Internet Printer Connection software)

ENPS-2012

2-USB & 1-Parallel Print Server

- Netware: Fully compatible with DHCP, NDS and Bindery
- Windows NT/2000: TCP/IP LPR Port Printing, IPX, NetBEUI and TCP/IP
- Windows 95/98/ME: Supports Windows Peer-to-Peer Networks, IPP, IPX, NetBEUI and TCP/IP.
- MAC OS: Supports AppleTalk (Ethernet Phase II) with MAC OS version 8.0 or after
- UNIX: Supports RFC 1179 standard, IPP, TFTP, RARP, BOOTP and DHCP
- Internet (via Internet Printer Connection software)

Back to Network Accessory

Back to Product

All information included in this presentation is for marketing purpose only.

Wireless Coverage Expansion

ENAT-OD7

(Popular)

7 dBi Omni-Directional Wireless Antenna

- Increase The Wireless Signal of 802.11 b/g/n Networks
- Eliminate Dead Spots and Improve Wireless Network Coverage Area
- Simply Replace The Antennas That Some with Wireless Devices

SPECIFICATION

Frequency Range	**2.4~2.5 GHz**
Gain	**7dBi**
Polarization	**Vertical**
Impedance	**50 Ω**
V.S.W.R.	**≤ 2.0**
Connector	**Reverse SMA**
Environment	**Indoor only**
Dimensions	**265.5 x 14.5mm (Length & Diameter)**

Back to Network Accessory

Back to Product

All information included in this presentation is for marketing purpose only.

Wireless Coverage Expansion

ENAT-S04

2.4Ghz wireless Antenna Booster

- Boost transmission power by 3x
- 1.5m extension cable included
- Work with Encore wireless series

Back to Network Accessory

Back to Product

All information included in this presentation is for marketing purpose only.

Wireless Coverage Expansion

ENRXWI-G *(Phase out soon)*

802.11 G LAN Extender

- Provide Ethernet to Wireless LAN bridge fully compatible on Ethernet side and fully IEEE 802.3 compatible on the Ethernet side and fully interoperable with IEEE 802.11g compliant equipment
- Provide 10/100 BASE-TX Fast Ethernet interface
- IEEE 802.11g Infrastructure operating mode
- Web-based configuration management
- Supports WDS bridging, AP Client mode
- Supports wireless security standards WPA, WPA-PSK, WPA2, WPA2-PSK, 64/128-bit WEP

Back to Network Accessory

Back to Product

All information included in this presentation is for marketing purpose only.

C. Wired Networking

-STANDARD-	-FUNCTION-
■ 10/100/1000Mbps Gigabit Ethernet	● (Managed) Switch
■ 10/100Mbps Fast Ethernet	● Router
■ 56.6k Fax/Modem	● Network Interface Card
	● Modem
	● ADSL 2+ Modem (New)

Back to Content

Back to Product

10/100/1000 Gigabit Ethernet

ENMGS-24+4

** ENMGS-16+2 also available**

24-Ethernet + 4-GBIC(mini) Port Gigabit Managed Switch

- Features 24 10/100/1000Mbps Gigabit Ethernet ports
- Features 4 shared* SFP ports for mini-GBIC (optical fiber) interface**
- Allows each port to run at its optimal speed while reducing network congestion
- Support QoS function, port base, tag base, DSCP priority and Rate Limit (ICMP Rate, Broadcast Rate, Multicast Rate, Ingress/Egress)
- Supports Port Trunk function to solve the bandwidth bottleneck on backbone connection and VLAN function for enhanced security

- *For each detected mini-GBIC connection, one corresponding Ethernet port will be disabled. In other words, ENMGS-24+4 has up to 24 Gigabit connections.*
- *Mini-GBIC (Optical Fiber) Adapter is not included.*

ENHGS-800X3

** 16- / 8- / 5- Port **

8-port Gigabit Switch

- Plug-n-play without any software to configure
- Store-and-forward switching mode promises low latency while reduces network errors
- More bandwidth without congesting the network
- Auto MDI/MDI-X function allows connection between hubs, switches and routers without crossover cables
- Automatically detects between 10Mbps, 100Mbps and 1000Mbps
- Rich diagnostic LED indicators of each port and the system

Back to Wired

Back to Product

All information included in this presentation is for marketing purpose only.

10/100/1000 Gigabit Ethernet

ENHGS-224

2-Gigabit / 24-Fast Ethernet Switch

- Plug-n-play without any software to configure
- Store-and-forward switching mode promises low latency while reduces network errors
- More bandwidth without congesting the network
- Auto MDI/MDI-X function allows connection between hubs, switches and routers without crossover cables
- Automatically detects between 10Mbps, 100Mbps and 1000Mbps
- Rich diagnostic LED indicators of each port and the system
- Rack Mountable

ENLGA-1320

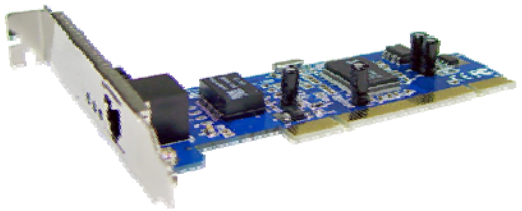

Gigabit Ethernet PCI Adapter

- Supports auto-negotiation and parallel detection for speed (10/100/1000Mbps) and duplex mode (Half/Full) detection.
- Supports 32-Bit and 64-Bit PCI
- Adapter fault tolerance, supports Jumbo packets.
- Plug and Play Installation
- Supports extensive LED indicators for network diagnostics.

Back to Wired

Back to Product

All information included in this presentation is for marketing purpose only.

10/100 Fast Ethernet

ENH924-AUT

24-10/100 Fast Ethernet Switch

- Plug-n-play without any software to configure
- Store-and-forward switching mode promises low latency while reduces network errors
- More bandwidth without congesting the network
- Auto MDI/MDI-X function allows connection between hubs, switches and routers without crossover cables
- Automatically detects between 10Mbps and100Mbps
- Rich diagnostic LED indicators of each port and the system
- Rack Mountable

ENH916P-NWY

** 16- / 8- / 5- Port **

(Popular)

16-10/100 Fast Ethernet Switch

- Plug-n-play without any software to configure
- Store-and-forward switching mode promises low latency while reduces network errors
- More bandwidth without congesting the network
- Auto MDI/MDI-X function allows connection between hubs, switches and routers without crossover cables
- Automatically detects between 10Mbps and100Mbps
- Rich diagnostic LED indicators of each port and the system

Back to Wired

Back to Product

All information included in this presentation is for marketing purpose only.

10/100 Fast Ethernet

ENUET-3USB

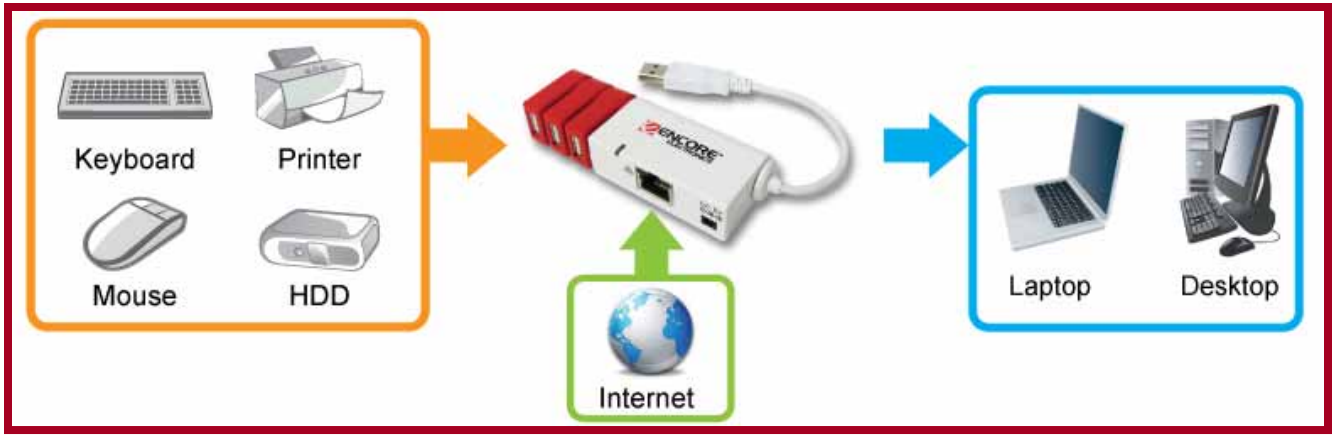

3-Port USB Hub with Ethernet Adapter *(Popular)*

- Ideal for Netbook and Laptop Computers
- Rotating USB Ports for Easy Connection
  - Each port can rotate up to 180 ° to accommodate devices of different sizes
- Convenient and Portable USB Mini-Dock
  - Single connection to Internet, keyboard, external hard drive, webcam etc. in one step
- Reliable Internet Connection
  - Provides wired Internet connection for computers without it
- Simple Way to Add More USB Ports
  - Connects more devices without plugging and unplugging them

SPECIFICATION

Interface	USB 2.0, backward compatible with USB 1.x
USB Port	3 x USB 2.0 Ports, backward compatible with USB 1.x
Internet Port	1 x 10/100Mbps Ethernet port
Dimensions	98 x 36 x 20 mm (L x W x H) (without cable)

Back to Wired
Back to Product

All information included in this presentation is for marketing purpose only.

10/100 Fast Ethernet

ENL832-TX-EN

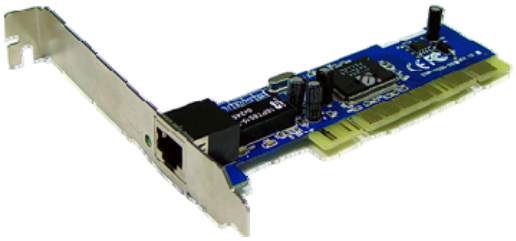

10/100 Fast Ethernet PCT Adapter

- Complies with Full-Duplex operation and flow control
- NWay auto-negotiation mechanism that detects the network speed (10/100Mbps) and transmission mode (Full/Half duplex) automatically
- 32-bit bus master for high throughput and low CPU utilization
- Diagnostic LED mounted on bracket for easily viewing and troubleshooting
- Network drivers for Windows OSs, NetWare, Unix
- Plug and Play

ENRTR-514

Broadband Router

- Supports Universal Plug-and-Play for Easy Configuration
- Advanced Security Features and Firewall
  - safeguards your data and prevents intruders
- Shares Internet Connection at Home or Office
  - cost effective and reliable way to setup home or office network
- 2-in-1
  - router and 4-Port switch

Back to Wired

Back to Product

All information included in this presentation is for marketing purpose only.

56.6k, V.92

ENF656-USB-AGER

USB Fax/Modem

- USB v1.1 compliant
- Bus powered design. Needs no additional power adapter
- Plug and play compatible for easy installation and configuration
- Data transfer rate up to 56 Kbps download and up to 48 Kbps upload
- Supports video conferencing
- Friendly GUI configuration and management software
- Support fax function with transfer rate up to 14.5 Kbps
- With answering machine function and telephony services

ENF656-ESW-MOPR

PCI Fax/Modem

- 32-bit PCI V2.2 and PCI bus power management interlace Vi .1 compliant
- Plug and play compatible for easy installation and configuration
- Data transfer rate up to 56 Kbps download and up to 48 Kbps upload
- Supports video conferencing
- Friendly GUI configuration and management software
- Supports fax function with transfer rate up to 14.4 Kbps
- Supports telephone answering machine function (TAM) and telephony services

Back to Wired
Back to Product

All information included in this presentation is for marketing purpose only.

ENDSL-A2+4R2

** 4- / 1- Port **

ADSL2+ Modem w/4-port Router

- One USB port compliant with USB v1.1, full speed (12Mbps)
- Four RJ45 ports compatible with IEEE 802.3/802.3u, 10/100Mbps auto selection
- One RJ11 port for ADSL connection
- Firmware upgrade via FTP / TFTP (Web-based)
- SNMP Support
- Support Selection of Bridge or Router Mode, Configuration of VCs (Virtual Circuits), Configuration file backup and restore, PAP (Password Authentication Protocol), CHAP (Challenge Authentication Protocol), User authentication for PPP, Password Protected System Management, VPN (IPSec, PPTP, L2TP) Pass-Through

Back to Wired

Back to Product

All information included in this presentation is for marketing purpose only.

D. Multimedia

-VIDEO-

- Digital Media Player (coming soon)
- Audio / Video Grabber
- Mini Display Port (coming soon)
- USB Video Adapter
- Surveillance Camera / IP Camera / Webcam (coming soon)
- Digital TV Tuner (coming soon)
- Analog TV Tuner (new)

-AUDIO-

- USB Audio Adapter
- USB Speaker
- Sound Card

Back to Content
Back to Product

Multimedia

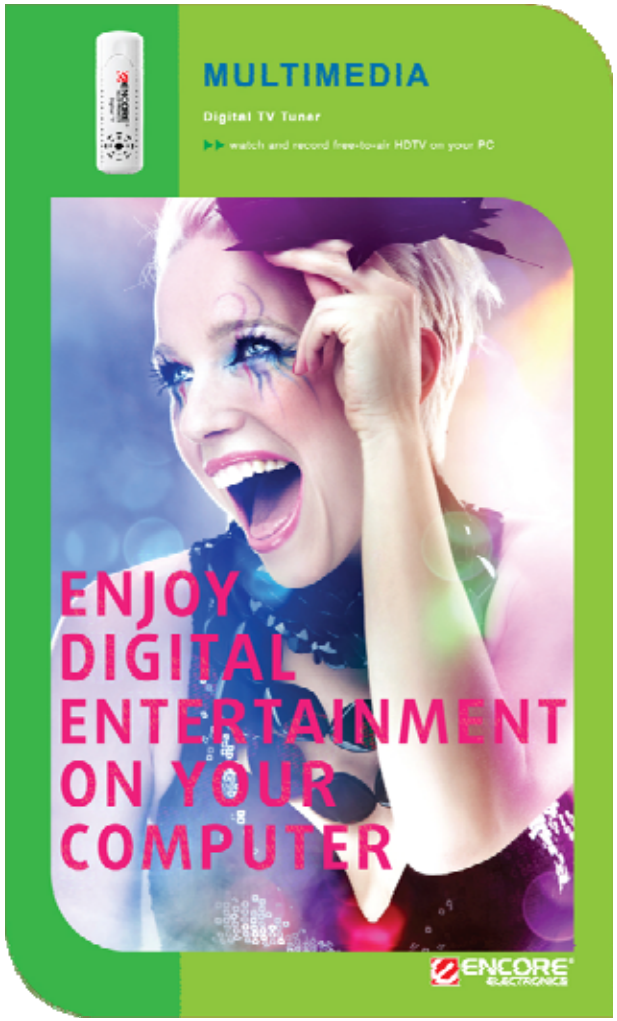

Back to Multimedia

Back to Product

All information included in this presentation is for marketing purpose only.

Digital Media Player

ENMMP-X211

(End of Q3)

Digital Media Player HD With Network Streaming

- Support Video Streaming from PC and Multiple Input Devices
- Convert Your Monitor into a Digital Photo Frame or Digital Signage
- Play Video, Picture and Music Files Directly on Your Entertainment Center
- Support Both Digital and Analog Monitors and Projectors
  - USB hard drives, flash drives and memory cards

SPECIFICATION

Input	
USB	2 x USB 2.0 ports to connect to external USB hard drives, flash drives, or other USB storage devices (backward compatible with USB 1.x)
Memory Card Reader	Support SD® and MMC® cards
Network (LAN)	1 x 10/100 Ethernet with RJ-45 connector
Digital Output	
Video Format	1080p, 1080i, 720p
Video & Audio	1 x HDMI output
Analog Output	
Video Format	NTSC (720x480) / PAL (720x576)
Video – Composite	1 x RCA connector (AV)
Video – Component	3 x RCA connectors (Y / Pb / Pr)
Audio	1 X 3.5mm stereo audio output
Format Support	
Video	Real Video (rm, rmvb), MPEG1/2 (dat, vob, mpg), MPEG4 / DivX / Xvid (avi, mp4, mkv), H.264 (mkv, ts, m2ts, avi, mov, mp4), Flash (swf)
Audio	MP3, WMA, WAV, OGG, AAC, AC3, M4A, DTS, RA/RM
Picture	BMP, JPEG, PNG
Subtitle Format	SRT / SSA / SUB / SMI / SUB+IDX
Extra Features	
Convenience	Remote control included and PC-free operation
UPnP Support	Yes
Dimensions	150 x 105 x 250 mm (W x H x D)

Back to Multimedia
Back to Product

All information included in this presentation is for marketing purpose only.

Digital Media Player

ENMMP-X211

Digital Media Player HD With Network Streaming

Back to Multimedia
Back to Product

All information included in this presentation is for marketing purpose only.

Digital Media Player

ENMMP-X210

(Popular)

Digital Media Player For TV and Computer

- Support Both TV and Computer Monitors
  - Any monitor with the supported video inputs
- Support Multiple Storage Devices
  - USB external hard drives, USB flash drives, and a variety of memory cards
- Play Video and Picture Files Directly on a Large TV
  - Watch video on your home entertainment center
- Play Music Files Directly on a Hi-end Sound System
- Add Background Music to Your Slideshows

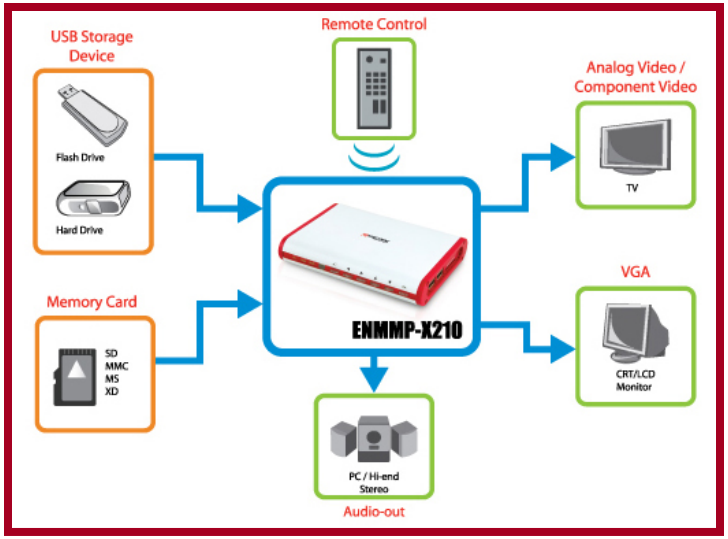

Input	
USB 2.0	2X USB 2.0 ports, backward compatible with USB 1.x (for External USB Hard Drives, Flash Drives, or other USB Storage Devices)
Memory Card Reader	Support MS®, SD/SDHC®, MMC®, and XD® cards
Output	
TV Format	NTSC / PAL
Video – Component	3X RCA connectors (Y / Pb / Pr) , resolution up to 720 x 576
Video – Composite	1X RCA connector (AV) , resolution up to 720 x 576
Video – VGA	1X 15-pin D-Sub connector, resolution up to 1024 x 768
Audio – Stereo	2X RCA connectors (Left and Right)
Format Support	
Video	Real Video (RM / RMVB), MPEG-1/2 (MPG / DAT / VOB), MPEG-4 (AVI) XVID (AVI), and DIVX (AVI)
Audio	Real Audio (RA), AAC, OGG, MP3, WMA, and WAV
Picture	BMP, JPEG, and PNG
Extra Features	
Convenience	Remote Control and PC-free
Dimensions	150 x 105 x 25 mm (W x H x D)

Back to Multimedia
Back to Product

All information included in this presentation is for marketing purpose only.

Audio / Video Grabber

ENMVG

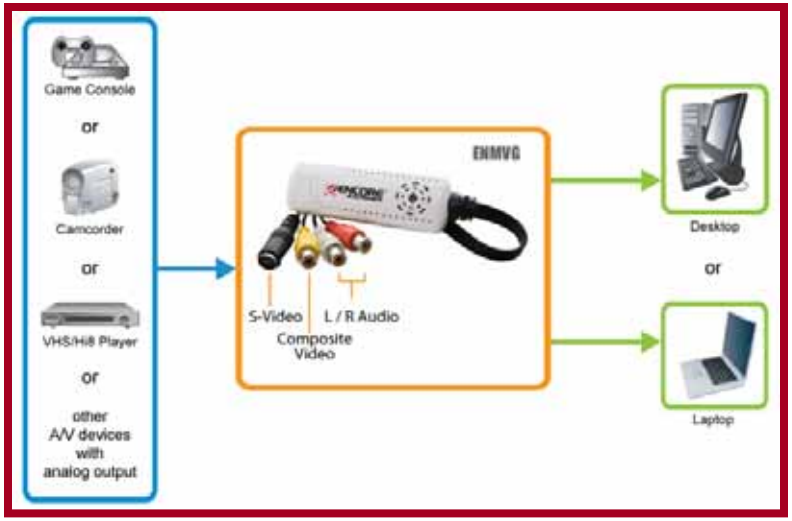

Audio / Video Grabber *(Popular)*

- Capture analog audio / video into computer, from external devices such as VCR, camcorder, gaming console and portable music player
- Unleash the director inside you with video editing software* of your choice, such as Microsoft® Windows Movie Maker™**
- Record real-time video up to 30fps
- Support MPEG-1 (VCD), MPEG-2 (DVD), MPEG-4 (XVID), AVI, WMV, BMP (still) and JPEG (still) formats

SPECIFICATION

Device Interface	USB 2.0, backward compatible with USB 1.x
Dimension	93 x 30 x 15 mm (excluding cables)
Video	
Signal Format	NTSC and PAL
Input	Composite RCA and S-Video
Resolution	NTSC — 720x480, 352x480, 352x240 PAL — 720x576, 352x576, 352x288
AD Converter	10-bit Analog-to-Digital Converter
File Format	AVI, MPEG-1(VCD), MPEG-2 (DVD), MPEG-4* (XVID) and WMV*
Audio	
Audio Channel	Stereo
Input	L/R RCA
AD Converter	16-bit Analog-to-Digital Converter
Sample Rate	44.1KHz / 48KHz
Audio Data Rate	128k ~ 192k bit/second

*WMV and MPEG4 format only provide Full D1 and SIF resolution.

Back to Multimedia
Back to Product

All information included in this presentation is for marketing purpose only.

Mini Display Port

Mini DP-HDMI

Mini DP-DVI

Mini DP-VGA

- Simplest way to connect your MacBook or any notebook with Mini DisplayPort to a larger external monitor!

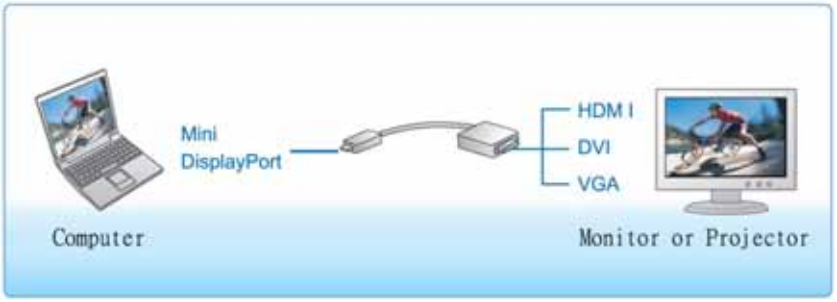

Model	ENCA-MDV	ENCA-MDD	ENCA-MDH
Interface	Mini DP to VGA	Mini DP to DVI	Mini DP to HDMI
Total Length	220.0 ±5.0 mm	220.0 ±5.0 mm	227.0 ±5.0 mm
Connector Dimension	VGA side: L*W*H=55.0*38.0*18.0 mm	DVI side: L*W*H=55.0*38.0*18.0 mm	HDMI side: L*W*H=60.0*21.0*13.0 mm
Compliance	Compliance with DisplayPort Specification V1.1a at 1.62/2.7Gbps data rate (Low bit rate/High bit rate)		
Encryption	Support DPCD Rev.1.1 & Support HDCP 1.3 with HDCP key embedded		
Resolution	Support up to WUXGA (1920X1200) and 1080p @60Hz (Full HD)		
Color	Support Digital Video Output in 18/24 /30 (deep color) bits format (6-bit, 8-bit, 10-bit per color RGB color format)		
Operating temperature	-45 degree centigrade to +85 degree c entigrade		

Back to Multimedia

Back to Product *(End of Q3)*

All information included in this presentation is for marketing purpose only.

USB Video Adapter

ENMUV-2

(Popular)

External USB Video Adapter 1920 x 1080 (DVI/VGA)

- Easy to Install
  - No Need to Open Computer Cases
- Makes Multi-tasking Easier
  - Ideal for users who work with multiple programs and windows at the same time
- Connects Up to 6 Additional Monitors
- Resolution up to 1920 x 1080
- Cost Effective Digital Signage Solution Ready
  - When used in conjunction with USB-over-Network Server (sold separately) and connected to a local area network

SPECIFICATION

Device Interface	USB 2.0
Video Output (option 1)	DVI-I
Video Output (option 2)	VGA (adapter included)
Video Resolution	up to 1920 x 1080
Number of Additional Monitors	Up to 6 (Each monitor needs an individual ENMUV-2 and a USB port) [1]
Dimensions (L x W x D)	84.5 (L) x 55.5 (W) x18 (H) mm

Back to Multimedia

Back to Product

All information included in this presentation is for marketing purpose only.

Surveillance Camera

ENXDVR-4C

- connect DVR to VGA monitor for easy setup – *no PC needed!*
- monitor remotely from a computer with Internet
- stream video to your 3G mobile phone while you are away
- crystal clear video quality – *no detail is missed!*
- 24 infrared LEDs with automatic On/Off

Digital Surveillance In A Box -
4-Channel Digital Video Recorder and
4 CCD Security Cameras with Night Vision *(Mid Q3)*

Back to Multimedia

Back to Product

All information included in this presentation is for marketing purpose only.

Surveillance Camera

ENXDVR-4C

Digital Surveillance In A Box - 4-Channel Digital Video Recorder and 4 CCD Security Cameras with Night Vision

- Weather Resistant — heavy-duty metallic casing
- Motion Dection — pinpoint suspicious events while saving hard drive space
- Remote — control all DVR functions in your hand
- Direct Backup — hassle-free data backup to USB flash drives
- 1TB max — hold one 2.5" SATA hard drive with capacity up to 1 terabytes
- high performance video codec with no quality compromise

Digital Surveillance In A Box is suitable for a wide range of venues, such as home, office, warehouse, clinic, retail store, restaurant and more.

Back to Multimedia

Back to Product

All information included in this presentation is for marketing purpose only.

Surveillance Camera

ENXDVR-4C

Digital Surveillance In A Box -
4-Channel Digital Video Recorder and
4 CCD Security Cameras with Night Vision

Extendable Weather Resistant Cover
24 Infrared LEDs for Night Vision
¼" High Precision CCD
Light Sensor for Automatic Night Vision
Adjustable Joint for Maximum Range of Motion
Vertical/Horizontal Mounting Stand

CCD Security Camera

Digital Video Recorder: Back View

DVR: Front View

Direct Viewing: VGA-Direct (PC-free)

No configuration and computer are required. Simply connect the security cameras and a VGA monitor to the DVR.

OR

Remote Viewing: Internet or local area network

Connect the DVR to your home or office network. Subsequently, any computer with network connection can browse and control the surveillance system through a web browser.

OR

Remote Viewing: 3G Mobile Phone (3GPP)

Connect the DVR to you home or office network. Install the bundled SecuViewer software on your 3G mobile phone. You also need to have data plan from your 3G service provider.

Back to Multimedia

Back to Product

All information included in this presentation is for marketing purpose only.

Surveillance Camera

ENXDVR-4C

Digital Surveillance In A Box - 4-Channel Digital Video Recorder and 4 CCD Security Cameras with Night Vision

Digital Video Recorder (DVR)
Video
Format : NTSC or PAL
Compression : MJPEG (recording) / MPEG4 (web streaming)
Display Resolutions : 640 x 448 (NTSC) / 640 x 544 (PAL)
Display Frame Rate : 120 fps (NTSC) / 100 fps (PAL)
Display Division : Single / Sequence / Quad (1/4)
Recording
Resolution : 640 x 224 (NTSC) / 640 x 272 (PAL)
Frame Rate : 60 fps (NTSC) / 50 fps (PAL)
Mode : Continuous / Scheduled / Motion Detection
Quality : High / Normal / Low
Network
Connection x 1 : 10/100 Mbps RJ-45 port
Protocol : TCP/IP, Static IP, DHCP, PPPOE , DDNS
Remote Operation : Monitor, Record, Playback

Connector
Video Input x 4 : RJ-45 Inputs (BNC video adapters are included.)
Video Output x 1 : VGA
USB 2.0 x 1 : for USB flash drive
Mouse x 1 : for USB mouse
Storage / Backup
Storage x 1 : internal 2.5" SATA HDD – up to 1 TB (not included)
Backup x 1 : external USB flash drive (not included)
Accessories
Video Adapter (Balun) x 4 : convert BNC Male (video) and RCA Male (audio) to RJ-45 connector
Mouse x 1 : USB mouse
Remote Control x 1 : IR remote control
External Power Adapter x 1 : Input: AC100~240V, 50/60Hz / Output: 12VDC, 5A
General
Dimensions : 18.1 x 4.2 x 12.8 cm / 7.2 x 1.7 x 5.0 inch (W x H x D)

Security Camera
Video
Image Sensor : 1/4" CCD
Resolution : 420 TV Lines
Total Pixels : 510 x 492 (NTSC) / 500 x 582 (PAL)
Lens : 3.6 mm
Electronic Shutter : 1/60 - 1/100,000 sec. (NTSC); 1/50 - 1/100,000 sec. (PAL)
Signal / Noise Ratio : 48dB (AGC off)
White Balance : automatic
Gain Control : automatic
Night Vision
Infra-Red LEDs x 24
Infra-Red Illumination : 3 Lux
Distance : 15m / 50ft (outdoor); 20m / 65ft (indoor)
On / Off : automatic
General
Indoor / Outdoor : all weather
Operating Temperature : -20°C ~ 50°C / -4°F ~ 122°F
Power Source : DC 12V ± 10%
Dimensions : 11.8 x 10.3 x 6 cm / 4.6 x 4.1 x 2.4 inch (stand included)

Back to Multimedia

Back to Product

All information included in this presentation is for marketing purpose only.

Surveillance Camera

ENCA-CCDP
ENCA-CCDN

Extendable Weather Resistant Cover
24 Infrared LEDs for Night Vision
¼" High Precision CCD
Light Sensor for Automatic Night Vision
Adjustable Joint for Maximum Range of Motion
Vertical/Horizontal Mounting Stand

SPECIFICATION

Video	
Video Format	NTSC or PAL
Image Sensor	1/4" CCD
Resolution	420 TV Lines
Total Pixels	510 x 492 (NTSC) / 500 x 582 (PAL)
Output Connector	Composite video with BNC connector
Lens	3.6 mm
Electronic Shutter	1/60 - 1/100,000 sec. (NTSC); 1/50 - 1/100,000 sec. (PAL)
Signal / Noise Ratio	48dB (AGC off)
White Balance	Automatic
Gain Control	Automatic (AGC)
Minimum Illumination	0 Lux (with Night Vision activated)
	Night Vision
Infra-Red LED	24
Infra-Red Illumination	3 Lux
Distance	15m / 50ft. (outdoor); 20m / 65ft. (indoor)
On / Off	Automatic
	General
Indoor / Outdoor	All weather
Operating Temperature	-20°C ~ 50°C / -4°F ~ 122°F
Power Source	DC 12V ± 10%
Dimensions	11.8 x 10.3 x 6 cm / 4.6 x 4.1 x 2.4 inch (stand included)

All Weather Color CCD Security Camera with Night Vision *(Mid Q3)*

- ¼" High Precision CCD
- Cover 65ft.(20m) Indoor and 50ft.(15m) Outdoor
- Dual Mode: Color (day) / B&W (night)
- Automatic Night Vision
- Extendable Weather Resistant Cover
- Heavy-Duty Metallic Casing

Back to Multimedia
Back to Product

All information included in this presentation is for marketing purpose only.

Webcam

ENUCM-012

Express Cam II

- Features unique detachable design offering maximum range of motion
- Equips with built-in microphone for crisp, vibrant sound
- 1.3M Pixel CMOS
- 7.5M Pixel Interpolated
- Snap-Shot button
- Built-in Microphone
- Built-in 9 Lovable Frames and 17 Special Effects
- Create Your Own Lovable Frames

Specification：
Interface：USB 2.0 and 1.1 compliant
Optical Sensor Type：1/4" CMOS
1.3 Mega Pixels CMOS
7.5 Mega Pixels (Interpolated) 3200X2400, 2560X1920, 1600X1200, 1280X1024, 800X600, 640X480, 352X288, 320X240, 176X144, 160X120
Built-in Microphone
Max Frame Rate：30fps @ 320X240
Camera Function：Adjustable Manual Focus, Auto White Balance, Auto Exposure, Snap-Shot, Face Tracer, Image Auto Compensate, Effect Library, 4X Digital Zoom
Focus Distance：3cm to Infinity
Video Format：24 bit, True Color
Compatible with MSN® Messenger, Yahoo® Messenger, Skype®, NetMeeting
USB Cable Length：120 cm

Back to Multimedia
Back to Product

All information included in this presentation is for marketing purpose only.

Digital TV Tuner

Sample Digital TV Tuner Illustration

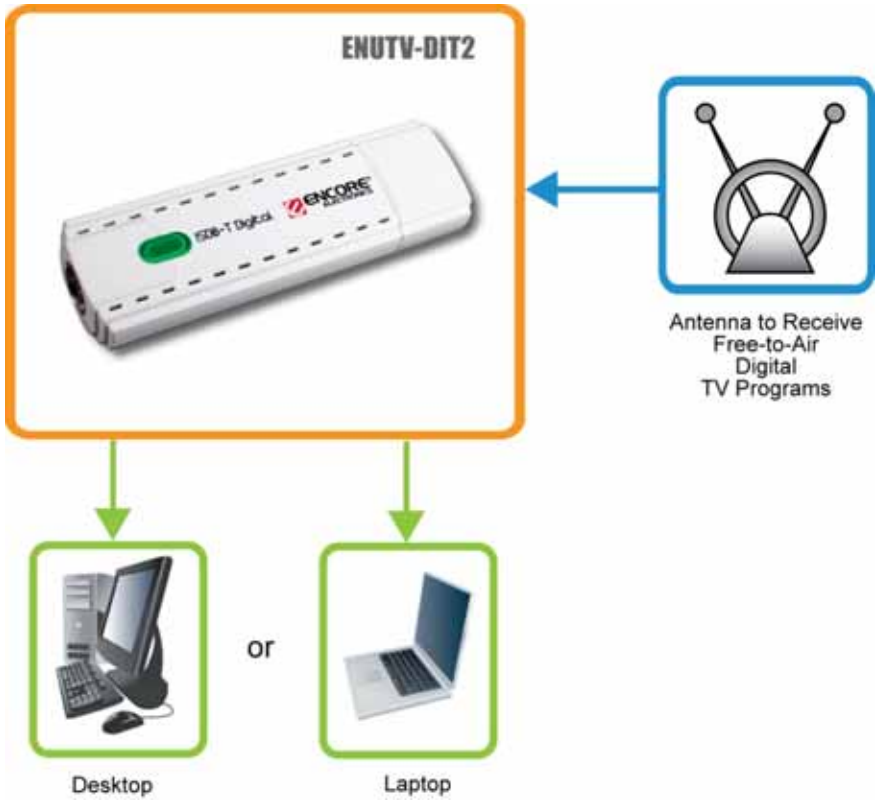

Back to Multimedia
Back to Product

All information included in this presentation is for marketing purpose only.

Digital TV Tuner

ENUTV-DIT2

(end of Q3)

USB Digital TV Tuner (ISDB-T/SBTVD)

- 2-in-1 Product
  - Digital TV Tuner / Digital Video Recorder
- Real-Time MPEG4 Recording
- H.264 High Quality Video Compression
  - Crystal clear picture quality
- Scheduled Recording and Time-Shift Live TV
  - Watch and record your favorite TV shows
- Full Function Infrared Remote Control
- Free BlazeVideo TV Player
  - Record video, time-shift playback, browse Electronic Program Guide and more

SPECIFICATION

Device Interface	USB 2.0
TV Tuner	ISDB-T / SBTVD (1seg and 3seg)
Antenna Connector	75Ω Coaxial Input (for free-to-air ISDB-T / SBTVD)
Video Output Resolution	Up to 320x240
Digital Video Format	MPEG-4 AVC (H.264)
Digital Audio Format	MPEG-4 HE-AACv2
Dimension (L x H x W)	95 x 30 x 15 mm

Back to Multimedia

Back to Product

All information included in this presentation is for marketing purpose only.

Digital TV Tuner

ENUTV-DDT

(Q3)

USB Digital TV Tuner (DVB-T)

- Real-Time MPEG2 Recording
- Remote Control
- Time-Shift Playback
  - pause, rewind and fast forward LIVE broadcast
- Watch Free-to-Air HD TV Program
- Burn-to-Disc
  - make your own DVDs or VCDs and view them on large TV set
- Free Total Media Software
  - turns your computer into a digital entertainment center

SPECIFICATION

Device Interface	USB 2.0
TV Tuner	DVB-T
Video Output Resolution	Up to 1080i / 720P HD video
Digital Video Format	MPEG-2
Advanced Features	Scheduled Recording; Electronic Program Guide (EPG); Snapshot; Teletex
Dimension	95 x 30 x 15 mm

Back to Multimedia

Back to Product

All information included in this presentation is for marketing purpose only.

Digital TV Tuner

ENUTV-DAT

USB ATSC Digital TV Tuner

- Watch free-to-air ATSC Digital TV on your PC or notebook computer
- USB 2.0 high speed interface, No extra power required, Plug-n-Play
- Decode HDTV signal (1920 X 1080i)
- Bundled with ArcSoft TotalMedia™ with direct burn-to-CD capability
- Infrared Remote Control
- EPG with auto-updates everyday and Channel Auto Scan function
- Supports Time-shifting and schedule recording in various video formats, including MPEG-2

SPECIFICATION

Device Interface	USB 2.0
TV Tuner	ATSC digital
Antenna Connector	75Ω Coaxial Input (for free-to-air ATSC TV)
Video Resolution	Up to 1920x1080i (HDTV)
Digital Video Format	MPEG-2
Digital Audio Format	Dolby Digital® AC3
Still Image Format	JPEG, BMP, PNG, TIF
Dimension (L x H x W)	

Back to Multimedia

Back to Product

All information included in this presentation is for marketing purpose only.

Analog TV Tuner

ENXTV-X3

(Popular)

External TV Tuner HD

- Up to 1920 x 1200 HD Video
- Advanced Digital Image Enhancements
- Watch PC and TV on The Same Screen
- Full Function Remote Control
- Pure Plug-and-Play
  - No driver or software needed
- PC-Free Mode
  - Watch TV programs or play console games without turning on your PC

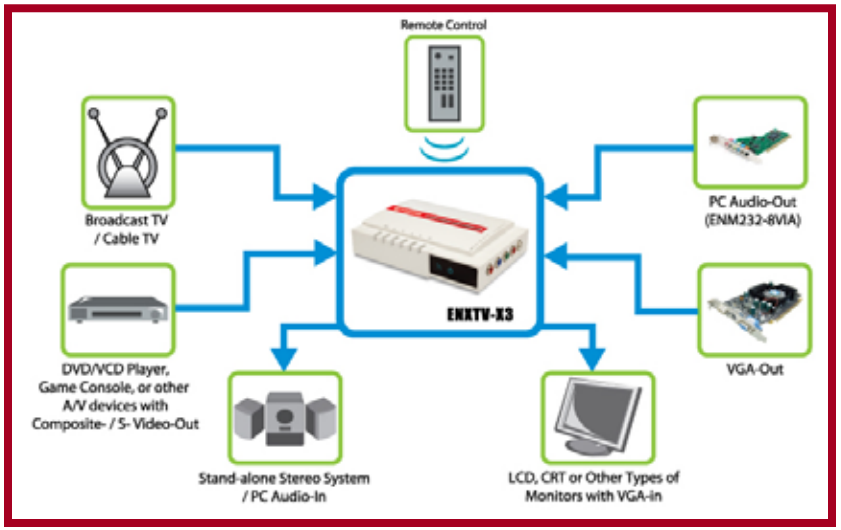
Remote Control
Broadcast TV / Cable TV
PC Audio-Out (ENM232-8VIA)
ENXTV-X3
DVD/VCD Player, Game Console, or other A/V devices with Composite- / S- Video-Out
VGA-Out
Stand-alone Stereo System / PC Audio-In
LCD, CRT or Other Types of Monitors with VGA-in

SPECIFICATION

TV Format	NTSC, PAL, SECAM
Output Resolution	Up to 1920 x 1200
Video Input x5	RCA Component, RCA Composite, S-Video, PC VGA (D-sub) 75Ω Coaxial Input (for broadcast TV or cable TV)
Video Output x1	PC VGA (D-sub)
Audio Input x2	3.5mm Stereo Mini Jack, RCA Stereo
Audio output x1	3.5mm Stereo Mini Jack

Back to Multimedia
Back to Product

All information included in this presentation is for marketing purpose only.

Analog TV Tuner

ENUTV

ENUTV-2

ENLTV-FM3

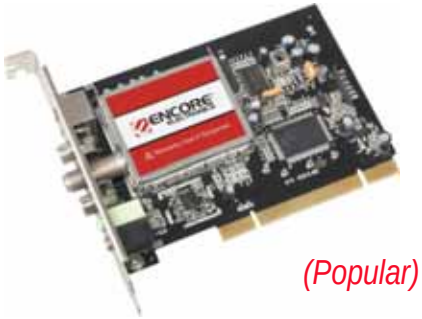

(Popular)

USB TV Tuner

- Support scheduled recordings
- Time Shifting allows you to pause a live broadcasting and then return to it after few minutes.
- Full function Remote control and Easy to use interface
- Real-time recording Support MPEG-1 MPEG-2 WMV video format to burn VCD or DVD. Full motion video capture up to 30fps.
- VBI Supports Teletext.
- Supports an abundance of input devices such as antenna, cable TV, DVD player, Camcorders, VCR, etc
- Support NetMeeting for Videoconference.
- Supports popular video compression (AVI, MPEG, WMV)

PCI TV Tuner with FM Radio

- Support scheduled recordings and time-shift viewing
- FM Tuner for listening and recording Radio programs
- Full function Remote control and Easy to use interface
- Support MPEG-1 MPEG-2 WMV AVI video formats to burn VCD or DVD.
- Full motion video capture up to 30fps.
- VBI Supports Teletext.
- Supports an abundance of input devices such as antenna, cable TV, DVD player, Camcorders, VCR, etc
- Support NetMeeting for Videoconference.

- *Model w/o FM tuner is also available.*

Back to Multimedia

Back to Product

All information included in this presentation is for marketing purpose only.

USB Audio Adapter

ENMAB-8CM

(Popular)

7.1 Channel USB Audio Box

- 2 Microphone Inputs
- 7.1 / 5.1 / 2.1 Channel Surround Output
- Simplest Way to Add Surround Audio to Netbooks and Laptops
- Simplest Way to Add Digital Audio Input / Output
- Enhanced Music, Movie and Gaming Experience

SPECIFICATION

Interface	USB 2.0, backward compatible with USB 1.x
Sample Rate	48 / 44.1 KHz for recording and playback
Input	Microphone x2, Line-in x1, S/PDIF-in (digital) x1
Surround Audio Output	7.1 / 5.1 / 2.1 channel
Additional Audio Output	Headphone x1, Line-out x1, S/PDIF-out (digital) x1

Back to Multimedia

Back to Product

All information included in this presentation is for marketing purpose only.

USB Speaker

ENMUS

Portable USB Notebook Speaker *(Popular)*

- Pure Digital Audio Experience
- No Additional Power Required
- Plug and Play, No Driver Required
- Sleek, Lightweight, and Ideal for Travel
- Convenient Dual-Function Design, as a laptop Chip or a Desktop Stand

SPECIFICATION

Audio Input	**USB 2.0, backward compatible with USB 1.x**
Total Speaker Output	**0.7W max**
Power	**USB bus**
Size	**190 x 62 x 28 mm (W x H x D)**

Back to Multimedia

Back to Product

All information included in this presentation is for marketing purpose only.

Sound Card

ENM232 – 8VIA

7.1 Channel Sound Card

- Full-duplex 8CH DAC / 2CH ADC
- Supports 96K / 24 bit playback; 48K / 16 bit recording
- PCI Rev. 2.2 compliant with bus mastering modes
- Supports the latest Dolby® Digital EX and DTS ES 6.1 / 7.1 CH DVD soundtrack playback
- DirectSound™ 3 HW acceleration
- Zoomed Video Port Support
- ACPI compliant power down management

ENM232-6VIA

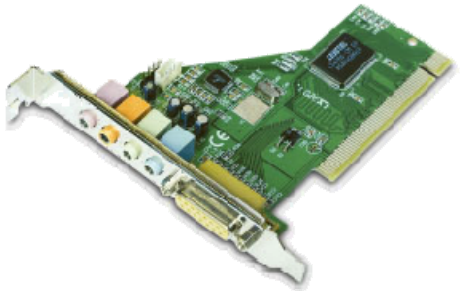

5.1 Channel PCI Surround Sound Card

- Full-duplex 6CH DAC / 2CH ADC
- Supports 96K / 24 bit playback; 48K / 16 bit recording
- PCI Rev. 2.2 compliant with bus mastering modes
- Supports the latest Dolby® Digital EX and DTS ES 5.1 CH DVD soundtrack playback
- DirectSound™ 3 HW acceleration
- Zoomed Video Port Support
- ACPI compliant power down management

Back to Multimedia

Back to Product

All information included in this presentation is for marketing purpose only.

E. Accessory

-FUNCTION-

- USB 3.0 (new)
- Mini Display Port (coming soon)
- Wireless Presenter
- File Transfer Cable
- KVM Switch
- HDD Enclosure

-FUNCTION-

- Memory Card Reader (coming soon)
- USB Hub
- Netbook Accessory
- Notebook Stand
- USB Charger
- Cable Pack
- Wireless Coverage

Back to Content
Back to Product

Accessory

Back to Accessory

Back to Product

All information included in this presentation is for marketing purpose only.

USB 3.0 Series

- Up to 10X Faster than USB 2.0*
- Less File Transfer Time
- Backward Compatibility
- Hot Swappable– No Need to Shut Down Your Computer
- Better Device Stability with Enhanced Power Output and Management

10X Faster

5 Gbps

ENPUH-302
USB 3.0 Express Card Adapter

ENLUH-302
USB 3.0 PCIe Adapter

ENXUS
USB 3.0 to SATA II Adapter

ENXUH-304
SuperSpeed USB 3.0 Hub 4-Port

ENCA-U3C1
SuperSpeed USB 3.0 Cable 6 ft. (1.8 cm)

Back to Accessory

Back to Product

All information included in this presentation is for marketing purpose only.

ENXUH-304

(End of Q3)

4-Port SuperSpeed USB 3.0 Hub

10X Faster

5 Gbps

- Up to 10X Faster than USB 2.0
- Backward Compatibility
- Better Device Stability with Enhanced Power Output and Management
- Less File Transfer Time
- Hot Swappable – No Need to Shut Down Your Computer

SPECIFICATION

Standard	USB 3.0 (backward compatible with USB 2.0 / 1.x)
Connectors	1x USB Type B Female 4x USB Type A Female
Data Rate	USB 3.0: up to 5 Gbps* USB 2.0: up to 480 Mbps USB 1.x: up to 12 Mbps
Adapter Dimension	61 x 96 x 22 mm (L x W x H)
External Power	Input: 100~240V / 50Hz~60Hz; Output: 5V, 4A (External power adapter is included in selected countries.)

Back to Accessory

Back to Product

All information included in this presentation is for marketing purpose only.

USB 3.0

ENXUS

(End of Q3)

USB 3.0 to SATA II Adapter

- Up to 10X Faster than USB 2.0
- No Driver Required – just Plug-and-Play
- No Enclosure Needed – Easy to Swap Hard Drives
- Compatible with 2.5”, 3.5” and 5¼” SATA Devices
- More Efficient Power Usage

SPECIFICATION

Standard	USB 3.0, backward compatible with USB 2.0/1.x
Host Connector	USB 3.0 Type B Female
Device Interface	SATA II, backward compatible with SATA I
Device Connector	22-pin SATA Data and Power Combo Male
Transfer Rate	USB 3.0: up to 5000Mbps (5 Gbps) USB 2.0: up to 480 Mbps SATA II: up to 3000 Mbps (3 Gbps) SATA I: up to 1500 Mbps (1.5 Gbps)
External Power[1]	Input: 100~240 V, 1.0 A Output: 12.0 V, 2000 mA / 5.0 V, 2000 mA (External power adapter is included in selective countries.)

Back to Accessory
Back to Product

All information included in this presentation is for marketing purpose only.

ENCA-U3C1

SuperSpeed USB 3.0 Cable 6 ft. (1.8m) *(New)*

- Less File Transfer Time
- More Efficient Power Usage
- Better Device Stability with Increased Power Output
- Backward Compatible with USB 2.0/1.1 host with Type A ports
- Type A Male to Type B Male, 6 ft. (1.8 m)

Back to Accessory

Back to Product

All information included in this presentation is for marketing purpose only.

USB 3.0

ENLUH-302

(Popular)

SuperSpeed USB 3.0 ExpressCard

- Up to 10X Faster than USB 2.0
- Backward Compatibility
- Better Device Stability with Increased Power Output
- Less File Transfer Time
- More Efficient Power Usage

SPECIFICATION

Standard	USB 3.0, backward compatible with USB 2.0 / 1.x
USB Port	2
Data Rate	USB 3.0: up to 5 Gbps* USB 2.0: up to 480 Mbps USB 1.x: up to 12 Mbps
Interface	PCI Express x1

Back to Accessory

Back to Product

All information included in this presentation is for marketing purpose only.

ENPUH-302

(Popular)

SuperSpeed USB 3.0 ExpressCard

- Up to 10X Faster than USB 2.0
- Backward Compatibility
- Better Device Stability with Increased Power Output
- Less File Transfer Time
- More Efficient Power Usage

SPECIFICATION

Standard	USB 3.0, backward compatible with USB 2.0 / 1.x
USB Port	2
Data Rate	USB 3.0: up to 5 Gbps* USB 2.0: up to 480 Mbps USB 1.x: up to 12 Mbps
Interface	ExpressCard 1.0
Power Output	5V / 300mA or 5V / 900mA with power adapter (not included)

Back to Accessory

Back to Product

All information included in this presentation is for marketing purpose only.

Wireless Presenter

ENUWP

(Popular)

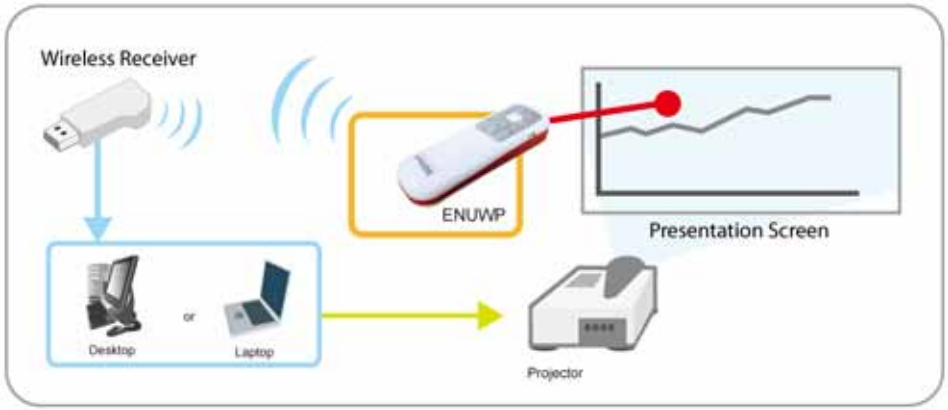

Wireless Presenter With Laser Pointer

- Roam Freely while Giving Presentations
- Compatible with PowerPoint , Keynote OpenOffice and StarOffice
- Safety Switch
  - Prevent unintentionally turning on the laser pointer
- No Driver or Software Required
  - Simply plug-and-play
- 2-in-1 Product
  - Wireless presenter and laser pointer
- Compact and Convenient
  - USB wireless receiver dongle is seamlessly integrated with the presenter

SPECIFICATION

Receiver Interface	USB 1.1/2.0
Advanced Feature	Laser Pointer
RF Band	2.4GHz ~ 2.4835GHz
Remote Control Range	Up to 15 meters
Dimension (L x W x H)	105 x 30 x 19.5 mm

Back to Accessory
Back to Product

All information included in this presentation is for marketing purpose only.

File Transfer Cable

ENUFTA-PC

(Popular)

Direct PC-To-PC File Transfer Cable

- No Installation CD Required
  - Easy to use and never worry about losing the installation disk
- Direct Two-Way File Transfer
  - No need to save file to an intermediary storage device anymore, such as flash drive or external hard drive
- No External Power Source Required
- Save Time in Backup and Transfer File

SPECIFICATION

Interface	USB 1.1/2.0
Transfer Rate	Up to 20 MB/s
Total Length	6 feet (1.8m)
Dimension	70 x 25 x 9 mm (L x W x H)

Back to Accessory

Back to Product

All information included in this presentation is for marketing purpose only.

ENKVM-USBB

(Popular)

2-Port USB KVM Switch With Easy Switch and Cable

- Easy Switch Button for Extra Convenience
  - Switch between two computers effortlessly
- Shares Full-Size KVM between Desktop and Laptop PCs
  - No need to unplug full-size keyboard, mouse and monitor from your desktop PC
- Compact Size and No External Power Needed
- Supports Video Resolutions up to 2048 x 1536

SPECIFICATION

Computer Connections	**2**
Port Selection	**Easy Switch Button**
Cable Length	**Computer 1.2m / Easy Switch 1.8m**
Video Resolution	**Up to 2048 x 1536**
Scan Interval	**3 / 5 / 10 / 20 Seconds**
Dimensions	**8.24 x 7.71 x 2.46 cm (L x W x H)**

Back to Accessory

Back to Product

All information included in this presentation is for marketing purpose only.

ENKVM-PS2

2-Port PS2 KVM Switch With Cables

- Share (**K**)eyboard, (**V**)ideo Monitor, and (**M**)ouse With Ease
- Save the cost of buying another KVM set for your second computer
- Share full-size KVM between desktop and laptop computers with ease
- Supports video resolutions up to 2048 x 1536
- Hot Keys and Auto Scan for easy switching
- Keyboard/Mouse Emulation to avoid unintentional computer rebooting
- Compact and no external power needed
- Support most OS, including Windows, Mac, Sun, Linux

SPECIFICATION

Computer Connections	2
Port Selection	Hotkey
Cable Length	1.2m
Video Resolution	Up to 2048 x 1536
Scan Interval	3, 5, 10, 20 Seconds
Keyboard/Mouse Emulation	PS/2
Dimensions	7.3 x 7.2 x 2.4 cm (L x W x H)

Back to Accessory

Back to Product

All information included in this presentation is for marketing purpose only.

HDD Enclosure

ENUHDE-IFP

(Popular)

1. Restrict access to sensitive data with fingerprint verification.
2. Take your files to anywhere you go with a peace of mind.
3. Access your files by scanning your fingerprint.

Fingerprint Security HDD Enclosure

- Protect Sensitive Data with Fingerprint Access
- Safely Travel with Your Data
- Transport Music, Movies, Photos and Documents with Ease
- Easy to Use with Plug-and-Play Feature

SPECIFICATION

Interface to PC	USB 2.0, backward compatible with USB 1.x
Interface to HDD	2.5" IDE Hard Drive, up to 750GB
Data transfer rate	Up to 480 Mbps
Size (Lx W x H)	8 x 13 x 2 cm (W x H x L)

Back to Accessory

Back to Product

All information included in this presentation is for marketing purpose only.

ENUCR-3W

(End of Q3)

3-Way Memory Card Reader / Copier

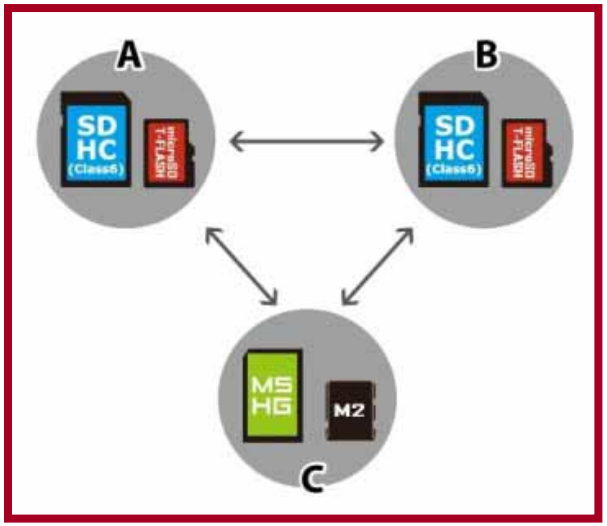

- Easily copy and transfer data between 2 memory cards
- Support SD, micro SD, MMC, MS, and MS Micro (M2) families of memory cards
- Auto detect card memory
- Up to 480 Mbps / sec
- Plug and Play
- Support USB port power
- LED indicator for activity：Easy to know the card status

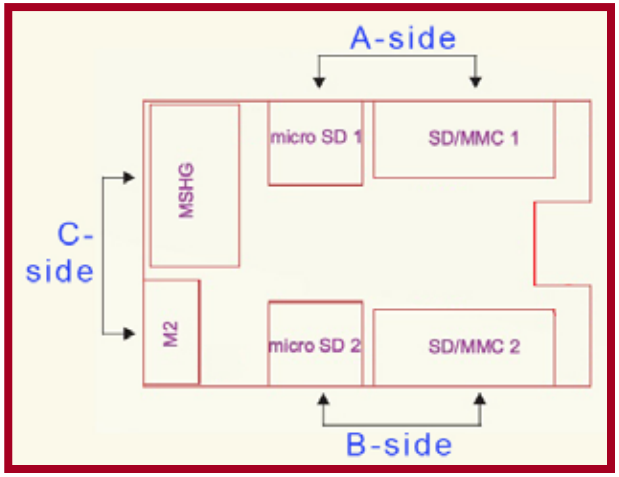

Back to Accessory

Back to Product

All information included in this presentation is for marketing purpose only.

ENUCR-3W

(End of Q3)

3-Way Memory Card Reader / Copier

Support format

- SD / SDHC / EXTREME SD / EXTREME III SD / ULTRA SD / ULTRA II SD / ULTRA II SD PLUS / SD-ULTRA-X / ULTRA SPEED SD / SD PRO / HS SD / SD ELITE PRO / MMC / MMC 4.0 / HS MMC / MMC 4.2 / HS RS MMC / RS MMC / RS MMC 4.0 / MMC Mobile / MMC PLUS / adapter required: mini SD / HS miniSD
- Micro SD (T-FLASH) / micro SDHC
- MSHG / MS PRO / MS PRO DUO / MS MG PRO / MS MG / MS MG DUO / MS MG PRO DUO / EXTREME MS PRO / MS SELECT / MS ROM / EXTREME III MS PRO / ULTRA II MS PRO / HS MS MG PRO / HS MS PRO / HS MS MG PRO DUO / HS MS PRO DUO
- M2

Back to Accessory

Back to Product

All information included in this presentation is for marketing purpose only.

ENUCR-3

(Popular)

Express Card reader

- Plug & Play
- 40 in 1 card reader
- Auto detect card memory
- Up to 480 Mbps/sec
- Support USB port power
- Windows® Server 2003 / XP / Vista / 7, Mac OS® 10.5 or later, Linux® Kernel version 2.4 or 2.6

Supporting format

- SD / MINI SD / HS MINI SD / EXTREME SD / EXTREME III SD / ULTRA SD / ULTRA II SD / SD-ULTRA-X / ULTRA SPEED SD / SD PRO / SD ELITE PRO / HS SD / SDHC / MMC / MMC 4.0 / HS MMC / HS RS MMC / RS MMC / RS MMC 4.0 / MMC Mobile / MMC Micro Auto detect card memory
- Micro SD (T-FLASH)
- MS / MS PRO / MS DUO / MS PRO DUO / MS MG PRO / MS MG / MS MG DUO / MS MG PRO DUO / EXTREME MS PRO / EXTREME III MS PRO / ULTRA II MS PRO / HS MS MG PRO / HS MS MG PRO DUO / HS MS PRO / HS MS PRO DUO / MS ROM / MS SELECT
- SIM

Back to Accessory

Back to Product

All information included in this presentation is for marketing purpose only.

USB Hub

ENUET-3USB

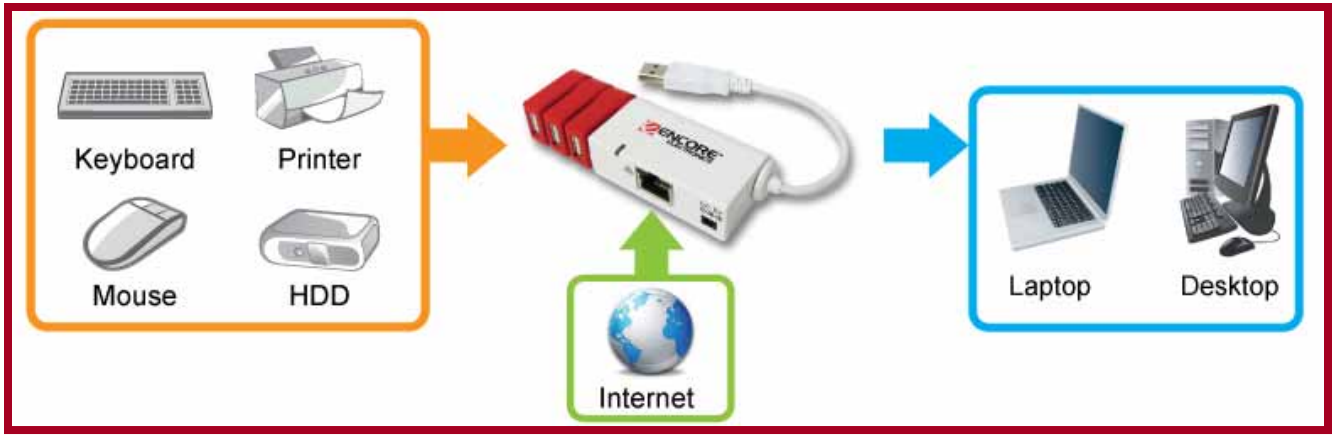

3-Port USB Hub with Ethernet Adapter *(Popular)*

- Ideal for Netbook and Laptop Computers
- Rotating USB Ports for Easy Connection
  - Each port can rotate up to 180 ° to accommodate devices of different sizes
- Convenient and Portable USB Mini-Dock
  - Single connection to Internet, keyboard, external hard drive, webcam etc. in one step
- Reliable Internet Connection
  - Provides wired Internet connection for computers without it
- Simple Way to Add More USB Ports
  - Connects more devices without plugging and unplugging them

SPECIFICATION

Interface	USB 2.0, backward compatible with USB 1.x
USB Port	3 x USB 2.0 Ports, backward compatible with USB 1.x
Internet Port	1 x 10/100Mbps Ethernet port
Dimensions	98 x 36 x 20 mm (L x W x H) (without cable)

Back to Accessory
Back to Product

All information included in this presentation is for marketing purpose only.

USB Hub

ENXUH-310

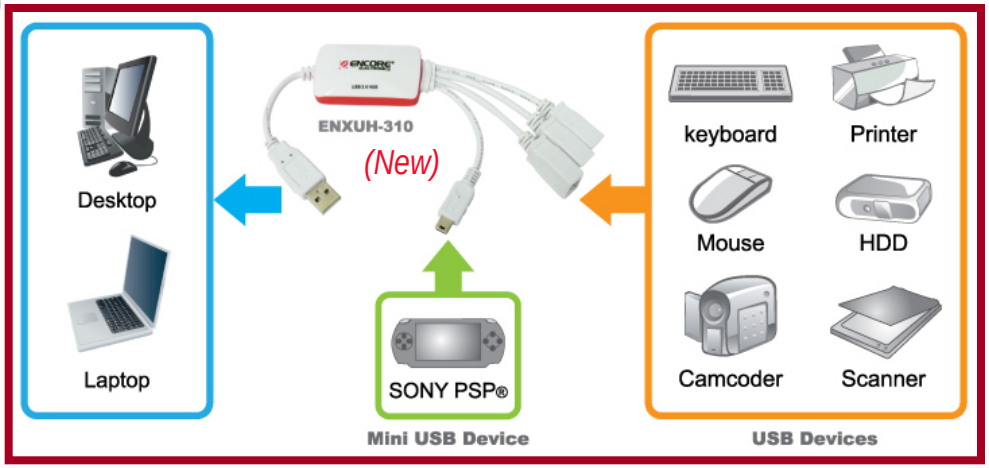

4-Port USB Hub With Mini USB *(Popular)*

- Instantly Adds More USB Ports to Your Computer
- No Installation CD Required
  - Features pure plug-and-play and has no installation disk to lose
- No External Power Required
  - Provides power to almost any device
- 5-Pin Mini USB Port for Extra Convenience
  - Saves you the hassle to look for special cables and directly connects to portable hard drive, digital camera, SONY PSP® and more
- Flexible Cables for Easy Connection
  - Avoids cluttered cables when the devices are placed closely

SPECIFICATION

Interface	USB 2.0, backward compatible with USB 1.x
Transfer Rate	Up to 480 Mbps
Total Length	26.6 cm
Adapter Dimension	5.5 x 3.2 x 1.4 cm (L x W x H)

Back to Accessory
Back to Product

All information included in this presentation is for marketing purpose only.

USB Hub

ENU-4USB

(Popular)

4-Port USB2.0 External Hub

- Plug and Play
- No external Power Required
- Cascade up to 127 USB devices
- Backwards compatible with USB 1.0/1.1
- USB 2.0 Support
- Includes USB Extension Cable

ENLUSB2-5PCI-BR

4 Ext.- & 1 Int.- port USB2.0 PCI Adapter

- Compliant with USB Revision 2.0 and 1.1
- Data transfer rate ranges between 1.5 to 480 Mbps
- Downstream port can handle high speed (12 Mbps) and low speed (1.5 Mbps)
- 32-bit 33Mhz host interface compliant to PCI Specification release 2.2
- Supports up to 127 devices
- PCL multi-function device consists of two UHCI Host Controller cores for full/low speed signaling and one EHCT Host Controller core for high speed signaling

Back to Accessory

Back to Product

All information included in this presentation is for marketing purpose only.

Netbook Accessory

ENCA-SXL

Portable Laptop Cooling Stand

- Easy to Carry
  - Compact and foldable design
- Adjustable Size
  - Fits to 12” – 17” notebook computers easily
- Overheating Prevention
  - Allows cool air to flow under your laptop
- Aluminum Frame with Protective Edges
  - Provides a sturdy base for your laptop without scratching the furniture

Specification:

Frame Material	Aluminum
Laptop Sizes	Fits to 12" - 17" Laptop Computers
Dimensions	Folds up to 6.4” x 1.6” x 1.5” (16.3 x 4.1 x 3.8 cm)
Weight	5.6 oz.

** ENCA-SXL not available in USA*

Back to Accessory

Back to Product

All information included in this presentation is for marketing purpose only.

Thank You